

MEPNN Supplier Scouting Opportunity Synopsis

Section 1: General Information

Scouting Number	2024-322
Item to be Scouted	Drywall Fasteners
Days to be scouted	30
Response Due By	11/15/2024
Description	<p>For the construction of the new Energy and Minerals Research Facility (EMRF) for the U. S. Geological Survey (USGS) at the Colorado School of Mines (Mines), Golden, Colorado 80401, provide packaged drywall fasteners delivered to the EMRF construction site.</p> <p>This project is federally funded by the President Joe Biden's Bipartisan Infrastructure Law (BIL). Therefore, the material used for construction is required to be compliant with the Build America, Buy America Act (BABAA). This NIST MEP Supplier Report seeks drywall fastener that meet or exceed the basis of design. The basis of design are Hilti Fasteners described herein (including additional information).</p> <ul style="list-style-type: none"> - (1) At all exterior metal framed walls provide #S-MD12-14x1 HWH Self Drilling Hex Head. - (2) At all exterior gypsum sheathing provide #6x1-1/4" PBH SD Z Self Drilling (Zinc Plated). - (3) At all interior metal framed walls provide #PPH SD ZI Self Drilling. - (4) At all interior gypsum drywall locations (wall and ceilings) provide #6x1-1/4" PBH SD Self Drilling (Phosphate Coated). <p>The basis of design drywall fasteners meets or exceeds the design requirements including the strict technical requirements, maximum size requirements, maximum delivery schedule, and the maximum cost parameters enclosed. See also the requirements stated in the enclosed information including, but not limited to, dimension and performance requirements, and other documents including applicable warranty requirements. See the quantities of screws required below.</p>
Notify Requester Immediately	
State item to be used in	Colorado

Section 2: Technical Information

Type of supplier being sought	Manufacturer
Reason	BABA
Describe the manufacturing processes (elaborate to provide as much detail as possible)	Electronic and mechanical assembly.
Provide dimensions / size / tolerances / performance specifications for the item	See information provided. Provide screws that meet or exceed the basis of design specifications for size and shape, durability, performance, installation ease (including self tapping and self drilling), heat treating, plating or coating, corrosion resistance, and strength requirements including, but not limited to, material strength, grip or clamp, sheer, and tensile strength.
List required materials needed to make the product, including materials of product components	Varies, see information provided.
Are there applicable certification requirements?	No
Are there applicable regulations?	No
Are there any other standards, requirements, etc.?	No

NAICS 1	238310 Drywall and Insulation Contractors
NAICS 2	
Additional Technical Comments	Provide drywall screws that conform to the strength and frequency requirements of the applicable drywall manufacturer's installation instructions, exterior and interior steel stud manufacturer's installation instructions, applicable building (IBC) and fire codes (IFC and NFPA). Provide screws that comply with International Building Code (IBC) ICC-ES ESR-2196, ICC-ES AC118, ICC-ES ESR-2196, AISI S904 and AISI S905.

Section 4: Business Information

Estimated potential business volume	Limited to one set of equipment. The minimum quantities for each type of fasteners are below. - (1) At all exterior metal framed walls provide #S-MD12-14x1 HWH Self Drilling Hex Head. Count 108,000. - (2) At all exterior gypsum sheathing provide #6x1-1/4" PBH SD Z Self Drilling (Zinc Plated). Count 92,000. - (3) At all interior metal framed walls provide #PPH SD ZI Self Drilling. Count 210,000. - (4) At all interior gypsum drywall locations (wall and ceilings) provide #6x1-1/4" PBH SD Self Drilling (Phosphate Coated). Count 940,000.
Estimated target price / unit cost information (if unavailable explain)	Total combined cost is a maximum of \$33,000. Screws, shipping, Costs also include providing approved submittal paperwork.
When is it needed by?	Provide drywall screws shipped to, and on-site, no later than 4/30/2025, 2:00 pm local time. If the schedule has delivery prior to the date above, the cost of holding equipment until the project can receive the equipment will not be permitted. Provide written manufacturer's submittal at least 90 days before they are required by manufacturer for review and approval.
Describe packaging requirements	Crate and package material and components for secure and undamaged transportation and delivery.
Where will this item be shipped?	Shipping will be to Golden, Colorado 80401, at the construction site address listed above.

Additional Comments

Is there other information you would like to include?	Point of Contact information for questions including BABA/Buy American compliance: Robert Lee ralee@mines.edu Please copy scouting@nist.gov on all correspondence.
---	---

EMRF Drywall Fasteners NIST Submission

Products: Hilti Fasteners

Dimensions and Performance Criteria: As specified below



PRODUCTS

BUSINESS OPTIMIZATION

ENGINEERING CENTER

SUPPORT AND DOWNLOADS

COMPANY

LOGIN OR REGISTER

MANAGE MY TOOLS

CONTACT

CART

Search

Home / Products / Fasteners / Screws

PBH SD SELF-DRILLING DRYWALL SCREWS Drywall screw 6 x 1-1/4" PBH SD #84290

Interior Drywall Screws



Single drywall screw (phosphate-coated) for fastening drywall boards to metal

- Screw head type: Bugle head
- Screw drive/recess type: PH #2
- Collated: No

[More technical data >](#)

Share



Customers also searched for [metal studs](#), [sheetrock](#), [self drilling](#), [gypsum wallboard](#) or [driller](#)

Select Options

[Start over](#)

Length

- 1 in
- 1-1/8 in
- 1-1/4 in**
- 1-5/8 in
- 1-7/8 in
- 2-3/8 in
- 2-5/8 in
- 3 in

Package content

Standard / single package

Pack size

- 1 pc
- 1400 pc
- 1600 pc
- 2500 pc
- 4000 pc
- 5000 pc
- 8000 pc**
- 10000 pc

[LOG IN](#) to see your company prices. Prices vary for Hawaii, Alaska, and US Territories.

Discounted net

\$152.00

\$152.00 / 1 Box

Quantity

Box 1

Total pieces 8000

ADD TO CART

Drywall screw 6 x 1-1/4" PBH SD #84290

[Check availability](#)

[View full product list \(22\)](#)

AGREE AND CLOSE




New to Hilti Online? See your customized prices and shop 24/7 > [Get access](#)

[Home](#) / [Products](#) / [Fasteners](#) / [Screws](#)

PBH SD Z SELF-DRILLING DRYWALL SCREWS Drywall screw zinc 6 x 1-1/4" PBH SD #86215

Zinc Plated Sheathing/ Wet area
Drywall Screws



Single drywall screw (zinc-plated) for fastening drywall boards to metal

- Screw head type: Bugle head
- Screw drive/recess type: PH #2
- Collated: No

[More technical data](#)

Share



Select Options

[Start over](#)

Length

1-1/8 in

1-1/4 in

1-5/8 in

1-7/8 in

2-3/8 in

2-5/8 in

3 in

Package content

Standard / single package

Pack size

1 pc

1400 pc

1600 pc

2500 pc

4000 pc

5000 pc

8000 pc

10000 pc

[LOG IN](#) to see your company prices. Prices vary for Hawaii, Alaska, and US Territories.

Discounted net

\$160.00

\$160.00 / 1 Box

Quantity

Box
1

Total pieces
8000

[ADD TO CART](#)

Drywall screw zinc 6 x 1-1/4" PBH SD #86215

New to Hilti Online? See your customized prices and shop 24/7 > [Get access](#)

[Home](#) / [Products](#) / [Fasteners](#) / [Screws](#)

PPH SD ZI SELF-DRILLING FRAMING SCREWS Drywall screw 7x7/16" PPH SD FRMR ZN 02 #2297631

Interior Framing Screws



Standard ●●●○○

Pan-head interior metal framing screw (zinc-plated) for fastening stud to track

- Screw head type: Pan head
- Screw drive/recess type: PH #2
- Collated: No

[More technical data >](#)

Share



Select Options

[Start over](#)

Length

7/16 in

Package content

Standard / single package

Pack size

1 pc

10000 pc

LOG IN to see your company prices. Prices vary for Hawaii, Alaska, and US Territories.

Discounted net

\$174.00

\$174.00 / 1 Box

Quantity

Box
1

Total pieces
10000

ADD TO CART

Drywall screw 7x7/16" PPH SD FRMR ZN 02 #2297631

New to Hilti Online? See your customized prices and shop 24/7 > [Get access](#)

[Home](#) / [Products](#) / [Fasteners](#) / [Screws](#)

S-MD HWH AND HHWH #3 SELF-DRILLING HEX SCREWS

Self-drill screw S-MD12-14x3/4 HWH3 #2099044

Exterior Framing Screws



Self-drilling hex head screw (zinc-plated) for fastening sheet metal to steel substructures

- Screw head type: Hexagon head
- Screw drive/recess type: 5/16 Hexagon
- Collated: No

[More technical data >](#)

Share



Select Options

[Start over](#)

Length

-

Package content

Standard / single package

Pack size

-
- \$445.00 / 1 Box

LOG IN to see your company prices. Prices vary for Hawaii, Alaska, and US Territories.

Discounted net

\$445.00

\$445.00 / 1 Box

Quantity



Box
1

Total pieces
5000

ADD TO CART


3.6.1 Self-Drilling Screw Fastener Selection and Design

3.6.1.1 Drill Point Selection

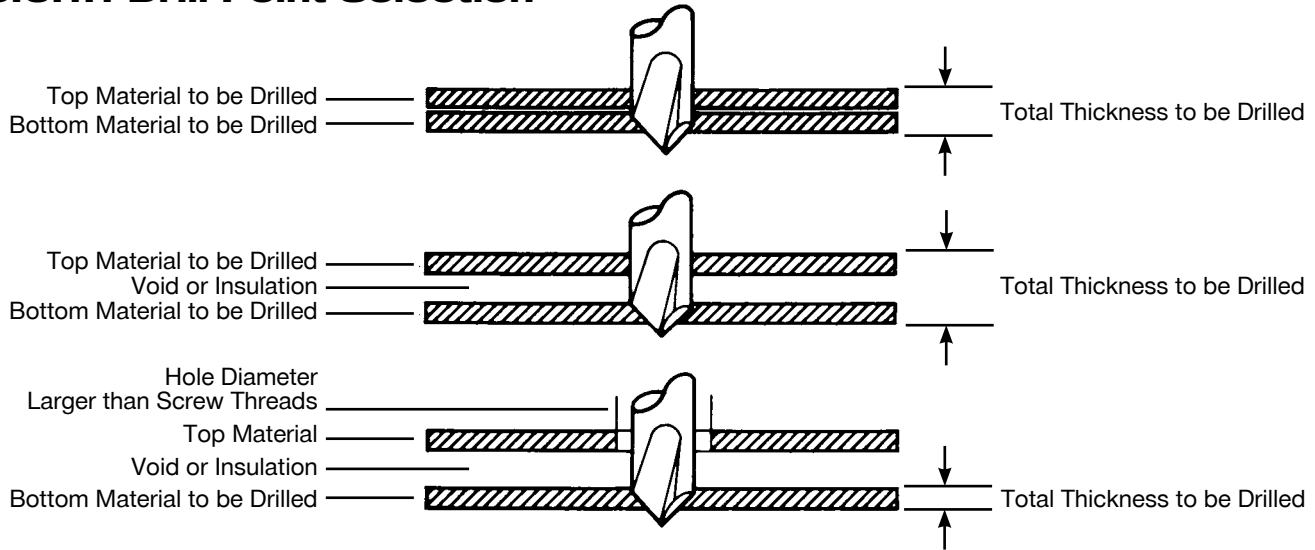


Drill Flute
The length of the drill flute determines the metal thickness that can be drilled. The flute itself provides a channel for chip removal during

drilling action. If it becomes completely embedded in material, drill chips will be trapped in the flute and cutting action will cease. This will cause the point to burn up or break.



Point Length
The unthreaded section from the point to the first thread should be long enough to assure the drilling action is complete before the

first thread engages the drilled metal. Screw threads advance at a rate of up to ten times faster than the drill flute can remove metal. All drilling therefore should be complete before threads begin to form.



Drilling Through Wood to Metal
If your application calls for drilling through wood over 1/2" thick, a clearance hole is required. Select a fastener with

breakaway wings for this type of job. The wings will ream a clearance hole and break-off when they contact metal surface (minimum metal thickness 0.06") to be drilled.

Drilling Capacity – Material Thickness Recommendations (Steel to Steel)

Thickness of material to be drilled (in.)	#2 Point		#3 Point				#4 Point		#5 Point
									0.500
0.500									
0.400									
0.300									
0.200					0.210	0.220	0.250	0.250	
0.100	0.100	0.110	0.140	0.175			0.175	0.175	0.250
0.035			0.100	0.110	0.110	0.110			
Screw Diameter	#6, #8	#10	#8	#10	#12	#14	#12	#14	#12

Note: Meets or exceeds ASTM C1513. Shaded areas represent total thickness of all steel including any void spaces between layers.

Self-Drilling Screw Fastener Selection and Design 3.6.1

3.6.1.2 Thread Selection

Metal Gauge

Gauge	Aluminum Metal	Sheet
	(Approx. Thickness in decimal parts of an inch)	
8	0.1285	0.1644
9	0.1144	0.1495
10	0.1019	0.1345
11	0.0907	0.1196
12	0.0808	0.1046
13	0.0720	0.0897
14	0.0641	0.0747
15	0.0571	0.0673
16	0.0508	0.0598
17	0.0493	0.0538
18	0.0403	0.0474
19	0.0359	0.0418
20	0.0320	0.0358
21	0.0285	0.0329
22	0.0253	0.0295
23	0.0226	0.0269
24	0.0201	0.0239
25	0.0179	0.0209
26	0.0159	0.0179
27	0.0142	0.0164
28	0.0126	0.0149

Fraction to Decimal


Fraction (in.)	Decimal Equivalent (in.)
1/64	0.015
1/32	0.031
3/64	0.046
1/16	0.062
5/64	0.078
3/32	0.093
7/64	0.109
1/8	0.125
9/64	0.140
5/32	0.156
11/64	0.171
3/16	0.187
13/64	0.203
7/32	0.218
15/64	0.234
1/4	0.250

Screw Diameter

Number	Decimal Equivalent (in.)
#6	0.1380
#7	0.1510
#8	0.1640
#10	0.1900
#12	0.2160
1/4	0.2500
5/16	0.3125


Thread Length

Always choose a fastener with sufficient threads to fully engage in the base metal. For attachments to 1/4" base steel, a self-drilling screw should have at least 1/4" of threads. It is helpful, but not critical, that the threads also engage in the material being fastened. The head of the fastener provides the bearing force for the material being fastened, while the threads provide the clamping force in the base material.

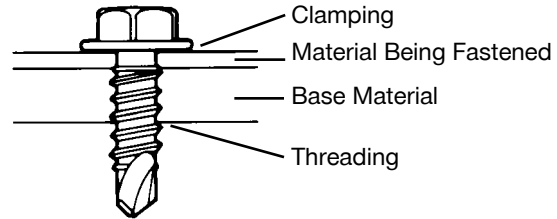


Thread Pitch

The thickness of material being fastened and diameter of the screw determine the type of thread pitch to be used. In general, the thinner the fastened materials, the fewer the number of threads. The thicker the material, the greater the number of threads. This principle is due to two primary methods of thread engagement/holding power: **Clamping** and **Threading**. In light gauge metal, the materials are actually being clamped together by the upper and lower threads.

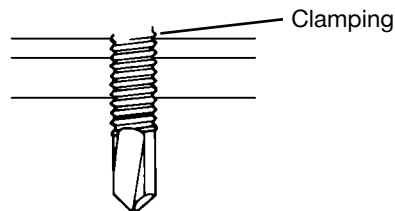

Thinner base material requires a coarser thread pitch to assure proper clamping. The thicker the material, the finer the threads must be. In very thick metal (3/8" to 1/2" thick), a fine thread is advisable. This will allow the thread to tap into the base material with less installation torque than a coarse thread.

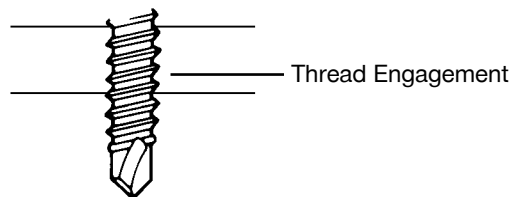

The importance of IBC compliant screws.

ICC-ES ESR-2196 provides IBC recognition of Hilti's Self-Drilling Screw Fasteners. This recognition was based on a comprehensive and rigorous independent evaluation of Hilti's Self-Drilling Screw Fasteners to the latest IBC code requirements in ICC-ES AC118 Acceptance Criteria for Self-Tapping Screw Fasteners, as well as the AISI S904 and AISI S905 test standards.

AC118 provides the IBC code recognition and quality assurance for screw fasteners. ICC-ES ESR-2196 recognizes many types of Hilti screws for the most common applications including CFS connections, gypsum to CFS, etc. Specifically, ESR-2196 covers the HWH, HHWH, PPH, PPFH, PBH, PWH, PTH, PPCH, TPCH and PFTH head style Hilti screws.

To ensure IBC compliance of screws on your next project, reference ESR-2196.



3.6.1 Self-Drilling Screw Fastener Selection and Design

3.6.1.3 Head Style Selection



HWH (HHWH)
(High) Hex Washer Head : Washer face provides a bearing surface for the driving sockets.



PPH (PPFH)
Phillips Pan (Framing) Head: Conventional head for general applications and provides low profile fastening.



PFH
Phillips Flat Head: Used primarily in wood to countersink and seat flush without splintering the wood.



PWH
Phillips Wafer Head: Large head provides the bearing surface necessary to seat flush in soft materials.



PBH
Phillips Bugle Head: Used primarily for fastening drywall, plywood or insulation board to steel studs.



PTH (MPTH)
(Modified) Phillips Truss Head: Large head and low profile provides surface area needed to attach wire lath to metal stud.



PPCH
Phillips Pancake Conventional Head: Head for general applications and provides low and flat profile.



PFTH
Phillips Flat Truss Head: Lowest profile head available for attaching metal to metal.



PFHUC
Pancake Framing Head Undercut: Used for countersinking where a full head taper would cause stand-off of the screw.



SHWH
Slotted Hex Washer Head: Hex washer head with slot in center to provide additional drive connection.

3.6.1.4 Sealing Criteria

Sealing washer screws offer weather resistant fastenings where moisture or condensation is a factor. The washer helps seal the hole to help prevent moisture from dripping into the fastener threads from the fastened material side, reducing corrosive build-up. As added protection against corrosion, all sealing washer screws come standard with Kwik-Cote coating. The torque control or depth gauge of the electric screwdrivers help ensure that the optimal seal is applied (Reference Section 3.6.1.7).




3.6.1.5 Length Selection

Length of the screw (L)

Depending on the screwhead, there are two different ways to measure the overall length of a screw.

For HWH/HHWH, PPH, PTH, PFTH, SHWH and PPCH screws, the overall length is measured from the bottom of the washer under the head to the point of the screw.


For PWH, PFH, PBH and PFHUC screws, the overall length is measured from the top of the head to the point of the screw.

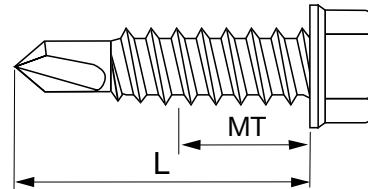

Maximum Total Thickness (MT)

The maximum total thickness (MT) for all screws is the length of the threads reduced by the first three threads (protruding past the back-side of the base material). See drawings above and below.

The maximum total thickness (MT) describes the maximum thickness of all attachments to be fastened plus the base material.

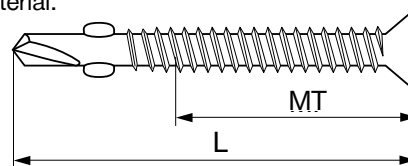

Self-Drilling Screw Fastener Selection and Design 3.6.1

3.6.1.6 Corrosion Resistance Guidelines

Self-Drilling Screw Fastener Selection Guidelines^{1,2,3,6,7}

Environment	Low Indoor - Dry: no moisture exposure		Medium Indoor and Exterior - Dry: minimal moisture exposure		High Indoor and Exterior - Wet: Heavy industrial or coastal areas with high prolonged moisture levels but no direct exposure to chlorides, and average temperatures below 86 °F (30 °C).	
Connection Type	Untreated Lumber-to-steel, steel-to-steel, gypsum-to-steel applications	Pressure-Treated ⁴ or Fire-Retardant Lumber-to-steel; aluminum-to-steel; dissimilar metals	Untreated Lumber-to-steel, steel-to-steel, gypsum-to-steel applications; cement board-to-steel	Pressure-Treated ⁴ or Fire-Retardant Lumber-to-steel; aluminum-to-steel; dissimilar metals	Untreated Lumber-to-steel, steel-to-steel, gypsum-to-steel applications	Pressure-Treated ⁴ or Fire-Retardant Lumber-to-steel; aluminum-to-steel; dissimilar metals
Screw Fastener Descriptions	Hardened Carbon Steel fasteners with electro-galvanized (min. 5 - 13 microns), black phosphate coatings	Carbon Steel, two-step heat treated fasteners with Kwik-Cote coating	Hardened Carbon Steel fasteners with Kwik-Cote coating	Carbon Steel, two-step heat treated fasteners with Kwik-Cote coating	300 series ⁵ stainless steel fastener	
Screw Fastener Designation	Hilti Zinc Plated Screws	Hilti Kwik-Flex	Hilti Self-Drilling Screws with Kwik-Cote or Kwik-Seal Designation	Hilti Kwik-Flex	Hilti Bi-Metal Kwik-Flex	
Product Technical Guide Section	Section 3.6.2 or 3.6.3	Section 3.6.4	Section 3.6.2	Section 3.6.4	Section 3.6.5	

- 1 If the moisture content of Pressure-Treated Lumber is high (> 18%) or unknown, stainless steel fasteners are recommended. Select appropriate stainless steel grade for your application.
- 2 Guidelines based on fastener coating / material resistance to environmental corrosion (commonly called rusting) and fastener hardening process / resistance to hydrogen assisted stress corrosion cracking (HASCC). Evaluate site conditions which may affect these guidelines, such as: corrosive agents other than those listed; expected service life; other (non-environmental) types of corrosion, etc.
- 3 In highly corrosive environments (such as direct exposure to chlorides with average temperatures above 86 °F (30 °C)) it is generally recommended that a Highly Corrosive Resistant (HCR) fastener be used. Contact Hilti Technical Support at 877-749-6337 for more information.
- 4 Pressure treated lumber refers to lumber such as SBX/DOT, Zinc borated ACQ, CA-B, CBA-A treated lumber.
- 5 Most 400 series stainless steels, such as 410 stainless steel, 410 super-passivated stainless steel and 400 modified stainless steel are generally considered susceptible to HASCC. Moreover, these grades of stainless steel are 18/0 – they contain chromium but no nickel which reduces corrosion resistance significantly when compared to 18/8 grades (302, 304) or 18/8/2 grade (316).
- 6 The decision as to which fastener optimally meets the demands of a specific application is ultimately the judgment of the Engineer of Record or other responsible person for the project.
- 7 Reference Section 2.3.3.1 for more information on corrosion resistance.

3.6.1 Self-Drilling Screw Fastener Selection and Design

3.6.1.7 Hilti Screw Fastener Installation Instructions*

It is essential that proper rpm, setting depth and torque be utilized when installing Hilti screws.

Install self-drilling screws perpendicular to the work surface. The self-drilling feature of the screw will drill a hole completely through the base material before tapping the threads. Do not apply excessive pressure. Too much pressure will slow the speed of the screwdriver, increasing the installation time and possibly leading to drill tip failure. The variable speed motors of Hilti screwdrivers enable the operator to start the screw in a precise position and drive it at the speed best suited for the application. Below, two recommended tools are discussed in detail. The tables below provide additional suggested tools as well as common socket and bit sizes.

Common Socket and Bit Sizes

Screw Size	Magnetic Nut Setter Size	Phillips Bit Size
#8	1/4"	2
#10	5/16"	2
#12	5/16"	3
1/4"	3/8"	3

The Hilti SD 2500 siding edition features a 2,500 rpm motor for fastening self-drilling screws in steel up to 1/4" (6 mm) thick. There is a depth gauge on the front of the tool for correct depth setting of screws.

The Hilti ST 1800 heavy duty torque adjustable screwdriver features a 1,800 rpm for fastening self-drilling screws in steel up to 1/2" (12 mm) thick. There is a depth gauge on the front of the tool for correct depth setting of screws. There is also an 18 position adjustable torque clutch for correct torque release setting of screws. By avoiding overdriving, proper torque adjustment will deliver consistent fastening quality.

The ST 1800 may also be operated with the SDT 5 for a stand-up decking system to fasten steel deck.

Please reference the table on torque considerations below for more information on proper installation of Hilti screw fasteners.

* These are abbreviated instructions which may vary by application. **ALWAYS** review/follow the instructions accompanying the product.

Torque Considerations for Screw Fastening Applications³

	Soft joint applications	Hard joint applications
Applications	These include, but are not limited to, typical applications involving interior drywall fastening, exterior sheathing, metal framing, HVAC duct and plywood to metal.	These include, but are not limited to, typical applications involving metal decking (both frame and sidelap), metal siding (both frame and sidelap), exterior façade and window glazing as well as any application where stripping of the base material may occur. Any application involving sealing washers requires a depth gauge or torque clutch to help ensure that an optimal seal is achieved.
Considerations ¹	These applications may not require a corded or cordless screwdriver that features either an adjustable torque clutch or a properly adjusted depth gauge. This is because the applications are considered non-structural and/or possess sufficient redundancy in fastening points that any impact of over-driving may be sufficiently mitigated.	These applications must utilize a corded or cordless screwdriver that features either an adjustable torque clutch or a properly adjusted depth gauge in order to ensure consistent fastening and achieve published connection capacities. This is because the applications are considered structural elements of the design. Over-driving may cause connection failures or fastener failures that possibly compromise the integrity of the connection.
Suggested Tools ²	Corded: SD 2500, SD 4500, ST 1800, SD 2500 Siding Edition, SI 100 Cordless: SF/H 14, SF/H 18, SD 4500-A, SID 144, SIW 144	Corded: SD 2500, SD 4500, ST 1800, SD 2500 Siding Edition Cordless: SF/H 14, SF/H 18, SD 4500-A Do not use impact drivers.

1 Whether an application requires a depth gauge or torque clutch is the judgment of the person responsible for the project. If conditions are unknown or in doubt, use a screwdriver that features either an adjustable torque clutch or a properly adjusted depth gauge.

2 All published screw fastening connection capacities were developed using corded or cordless screwdriver tools with adjustable torque clutches. Over-driving a screw fastener can cause a connection failure in lighter gauge and lower strength steel base materials (the threads tapping the base material are stripped by excessive torque) or a fastener failure in heavier gauge and higher strength steel base materials (the screw is damaged or sheared by excessive torque). This type of damage is not always visually detectable. Regardless of the tool or its torque setting, test fastenings should always be performed to verify the appropriate torque is being applied.

3 For additional information, contact Hilti Technical Services at 877-749-6337.

Self-Drilling Screws 3.6.2

3.6.2.1 Product Description

Hilti self-drilling screws are designed to drill their own hole in steel base materials up to 1/2" thick. These screws are available in a variety of head styles, thread lengths and drill-flute lengths for screw diameters #6 through 1/4". Hilti self-drilling screws meet ASTM C1513, ASTM C954 and SAE J78 standards, as applicable.

Product Features:

- Hex head for metal-to-metal applications
- Flush head for wood-to-metal applications
- For metal from 0.035" to 0.500" thick
- Winged reamers for wood over 1/2" thick
- Stitch screws for light gauge metal-to-metal
- Sealing screws for water resistant fastenings

- 3.6.2.1 Product Description
- 3.6.2.2 Material Specifications
- 3.6.2.3 Technical Data
- 3.6.2.4 Installation Instructions
- 3.6.2.5 Ordering Information



3.6.2.2 Material Specifications

Material	ASTM A510 Grade 1018-1022
Heat Treatment	Case hardened and tempered <ul style="list-style-type: none"> • Sizes 8, 10 and 12: 0.004" to 0.009" case depth • Size 1/4": 0.005" to 0.011" case depth
Plating	Refer to Section 3.6.2.5 for screw coating information.

Listings/Approvals

ICC-ES (International Code Council)
ESR-2196
COLA (City of Los Angeles)
RR 25678



Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

ICC-ES ESR-2196, provides IBC recognition of Hilti's Self-Drilling Screw fasteners for most common applications (e.g. CFS connections, gypsum to CFS, etc.), including HWH, HHWH, PPH, PPFH, PBH, PWH, PTH, PPCH, TPCH and PFTH head style screws.

3.6.2.3 Technical Data

Ultimate Tensile Strengths – Pullout (Tension), lb (kN)^{1,2,3,4,5,6,7}

Screw Designation	Nominal Diameter in.	Thickness of steel member not in contact with the screw head, ga (in.)					
		20 (0.036)	18 (0.048)	16 (0.060)	14 (0.075)	12 (0.105)	10 (0.135)
#6	0.138	190 (0.85)	250 (1.11)	320 (1.42)	395 (1.76)	555 (2.47)	715 (3.18)
#7	0.151	210 (0.93)	275 (1.22)	345 (1.53)	435 (1.93)	605 (2.69)	780 (3.47)
#8	0.164	225 (1.00)	300 (1.33)	375 (1.67)	470 (2.09)	660 (2.94)	845 (3.76)
#10	0.190	260 (1.16)	350 (1.56)	435 (1.93)	545 (2.42)	765 (3.40)	980 (4.36)
#12	0.216	295 (1.31)	395 (1.76)	495 (2.20)	620 (2.76)	870 (3.87)	1120 (4.98)
1/4 in.	0.250	345 (1.53)	460 (2.05)	575 (2.56)	715 (3.18)	1000 (4.45)	1290 (5.74)

1 The lower of the ultimate pullout, pullover, and tension fastener strength of screw should be used for design.
 2 Load values based upon calculations done in accordance with Section E4 of the AISI S100.
 3 AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
 4 ANSI/ASME standard screw diameters were used in the calculations and are listed in the tables.
 5 The screw diameters in the table above are available in head styles of pan, hex washer, pancake, flat, wafer and bugle.
 6 The load data in the table is based upon sheet steel with $F_u = 45$ ksi. For $F_u = 55$ ksi steel, multiply values by 1.22. For $F_u = 65$ ksi steel, multiply values by 1.44.
 7 Refer to Section 3.6.2.5 to ensure drilling capacities.

3.6.2 Self-Drilling Screws

Ultimate Tensile Strengths – Pullover (Tension), lb (kN)^{1,2,3,4,5,6,7}

Screw Designation	Washer or Head Diameter in.	Thickness of steel member in contact with the screw head, ga (in.)						
		22 (0.030)	20 (0.036)	18 (0.048)	16 (0.060)	14 (0.075)	12 (0.105)	10 (0.135)
Hex Washer Head (HWH)								
#8	0.335	675 (3.00)	815 (3.63)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#10	0.399	805 (3.58)	970 (4.31)	1290 (5.74)	1370 (6.09)	1370 (6.09)	1370 (6.09)	1370 (6.09)
#12-14	0.415	835 (3.71)	1010 (4.49)	1340 (5.96)	1680 (7.47)	2100 (9.34)	2325 (10.34)	2325 (10.34)
#12-24	0.415	835 (3.71)	1010 (4.49)	1340 (5.96)	1680 (7.47)	2100 (9.34)	2940 (13.08)	3780 (16.81)
1/4 in.	0.500	1010 (4.49)	1220 (5.43)	1620 (7.21)	2030 (9.03)	2530 (11.25)	3540 (13.75)	4560 (20.28)
Phillips Pan Head (PPH)								
#7	0.303	615 (2.74)	735 (3.27)	980 (4.36)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#8	0.311	630 (2.80)	755 (3.36)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#10	0.364	740 (3.29)	885 (3.94)	1180 (5.25)	1370 (6.09)	1370 (6.09)	1370 (6.09)	1370 (6.09)
Phillips Truss Head (PTH)								
#8	0.433	875 (3.89)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#10	0.411	830 (3.69)	1000 (4.45)	1330 (5.92)	1390 (6.18)	1390 (6.18)	1390 (6.18)	1390 (6.18)
Phillips Pancake Head (PPCH)								
#10, #12	0.409	830 (3.69)	995 (4.43)	1325 (5.89)	1370 (6.09)	1370 (6.09)	1370 (6.09)	1370 (6.09)
Phillips Flat Truss Head (PFTH)								
#10	0.364	740 (3.29)	885 (3.94)	1180 (5.25)	1475 (6.56)	1840 (8.18)	2170 (9.65)	2170 (9.65)

1. The lower of the ultimate pullout, pullover, and tension fastener strength of screw should be used for design.
2. Load values based upon calculations done in accordance with Section E4 of the AISI S100.
3. AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
4. ANSI/ASME standard screw head diameters were used in the calculations and are listed in the tables.
5. Phillips Bugle Head (PBH) and Phillips Wafer Head (PWH) styles are not covered by this table because they are not intended for attachment of steel to steel.
6. The load data in the table is based upon sheet steel with $F_u = 45$ ksi. For $F_u = 55$ ksi steel, multiply values by 1.22. For $F_u = 65$ ksi steel, multiply values by 1.44.
7. Refer to Section 3.6.2.5 for drilling capacities.

Nominal Ultimate Fastener Strength of Screw

Screw Designation	Nominal Diameter (in.)	Nominal Fastener Strength	
		Tension, P_{ts} lb (kN) ¹	Shear, P_{ss} lb (kN) ^{2,3,4}
#6-20	0.138	1000 (4.45)	890 (3.96)
#7-18	0.151	1000 (4.45)	890 (3.96)
#8-18	0.164	1000 (4.45)	1170 (5.20)
#10-12	0.190	2170 (9.65)	1645 (7.32)
#10-16	0.190	1370 (6.09)	1215 (5.40)
#10-18	0.190	1390 (6.18)	1645 (7.32)
#12-14	0.216	2325 (10.34)	1880 (8.36)
#12-24	0.216	3900 (17.35)	2285 (10.16)
1/4 in.	0.250	4580 (20.37)	2440 (10.85)

- 1 The lower of the ultimate pullout, pullover, and tension fastener strength of screw should be used for design. The Pullout and Pullover tables in this section have already been adjusted where screw strength governs.
- 2 The lower of the ultimate shear fastener strength and shear bearing should be used for design. The Shear Bearing table in this section has already been adjusted where screw strength governs.
- 3 AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
- 4 When the distance to the end of the connected part is parallel to the line of the applied force the allowable shear fastener strength must be reduced for end distance, when necessary, in accordance with E4.3.2 of Appendix A of AISI S100.

Torsional Strength^{1,2}

Size	Min. Torsional Strength in-lb (Nm)	
6-20	24	(2.7)
7-18	38	(4.3)
8-18	42	(4.8)
10-12	61	(6.9)
10-16	61	(6.9)
10-18	61	(6.9)
10-24	65	(7.3)
12-14	92	(10.4)
12-24	100	(11.3)
1/4-14	150	(17.0)
1/4-20	156	(17.6)

- 1 Based on screw only. Does not consider base material limitations.
- 2 Values in table are ultimate torsional strengths. To obtain maximum setting torque, multiply values in table by 0.66.

Self-Drilling Screws 3.6.2

Ultimate Shear Strengths – Bearing (Shear), lb (kN)^{1,2,3,4,5,6,7}

Screw Designation	Nominal Diameter in.	Thickness of steel member in contact with screw head ga (in.)	Thickness of steel member not in contact with the screw head, ga (in.)				
			20 (0.036)	18 (0.048)	16 (0.060)	14 (0.075)	≥ 12 (0.105)
#7	0.151	20 (0.036)	500 (2.22)	660 (2.94)	660 (2.94)	660 (2.94)	660 (2.94)
		18 (0.048)	500 (2.22)	660 (2.94)	880 (3.91)	880 (3.91)	880 (3.91)
		≥ 16 (0.060)	500 (2.22)	660 (2.94)	890 (3.96)	890 (3.96)	890 (3.96)
#8	0.164	20 (0.036)	525 (2.34)	715 (3.18)	715 (3.18)	715 (3.18)	715 (3.18)
		18 (0.048)	525 (2.34)	805 (3.58)	955 (4.25)	955 (4.25)	955 (4.25)
		≥ 16 (0.060)	525 (2.34)	805 (3.58)	1120 (4.98)	1170 (5.20)	1170 (5.20)
#10-12	0.190	20 (0.036)	565 (2.51)	830 (3.69)	830 (3.69)	830 (3.69)	830 (3.69)
		18 (0.048)	565 (2.51)	865 (3.85)	1110 (4.94)	1110 (4.94)	1110 (4.94)
		16 (0.060)	565 (2.51)	865 (3.85)	1210 (5.38)	1390 (6.18)	1390 (6.18)
		≥ 14 (0.075)	565 (2.51)	865 (3.85)	1210 (5.38)	1645 (7.32)	1645 (7.32)
#10-16	0.190	20 (0.036)	565 (2.51)	830 (3.69)	830 (3.69)	830 (3.69)	830 (3.69)
		18 (0.048)	565 (2.51)	865 (3.85)	1110 (4.94)	1110 (4.94)	1110 (4.94)
		≥ 16 (0.060)	565 (2.51)	865 (3.85)	1210 (5.38)	1215 (5.40)	1215 (5.40)
#10-18	0.190	20 (0.036)	565 (2.51)	830 (3.69)	830 (3.69)	830 (3.69)	830 (3.69)
		18 (0.048)	565 (2.51)	865 (3.85)	1110 (4.94)	1110 (4.94)	1110 (4.94)
		16 (0.060)	565 (2.51)	865 (3.85)	1210 (5.38)	1390 (6.18)	1390 (6.18)
		≥ 14 (0.075)	565 (2.51)	865 (3.85)	1210 (5.38)	1645 (7.32)	1645 (7.32)
#12-14	0.216	20 (0.036)	600 (2.67)	930 (4.14)	945 (4.20)	945 (4.20)	945 (4.20)
		18 (0.048)	600 (2.67)	925 (4.11)	1260 (5.60)	1260 (5.60)	1260 (5.60)
		16 (0.060)	600 (2.67)	925 (4.11)	1290 (5.74)	1570 (6.98)	1570 (6.98)
		≥ 14 (0.075)	600 (2.67)	925 (4.11)	1290 (5.74)	1800 (8.00)	1880 (8.36)
#12-24	0.216	20 (0.036)	600 (2.67)	930 (4.14)	945 (4.20)	945 (4.20)	945 (4.20)
		18 (0.048)	600 (2.67)	925 (4.11)	1260 (5.60)	1260 (5.60)	1260 (5.60)
		16 (0.060)	600 (2.67)	925 (4.11)	1290 (5.74)	1570 (6.98)	1570 (6.98)
		14 (0.075)	600 (2.67)	925 (4.11)	1290 (5.74)	1800 (8.00)	1970 (8.76)
		≥ 12 (0.090)	600 (2.67)	925 (4.11)	1290 (5.74)	1800 (8.00)	2285 (10.16)
1/4 in.	0.250	20 (0.036)	645 (2.87)	1020 (4.54)	1090 (4.85)	1090 (4.85)	1090 (4.85)
		18 (0.048)	645 (2.87)	995 (4.43)	1400 (6.23)	1460 (6.49)	1460 (6.49)
		16 (0.060)	645 (2.87)	995 (4.43)	1390 (6.18)	1820 (8.10)	1820 (8.10)
		14 (0.075)	645 (2.87)	995 (4.43)	1390 (6.18)	1940 (8.63)	2280 (10.14)
		≥ 12 (0.090)	645 (2.87)	995 (4.43)	1390 (6.18)	1940 (8.63)	2440 (10.85)

- 1 The lower of the ultimate shear bearing and shear fastener strength of screw should be used for design.
- 2 Load values based upon calculations done in accordance with Section E4 of AISI S100.
- 3 AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
- 4 ANSI/ASME standard screw diameters were used in the calculations and are listed in the tables.
- 5 Load values in table are for Hex Washer Head (HWH and HHWH), Phillips Pan Head (PPH), Phillips Truss Head (PTH), Phillips Pancake Head (PPCH), and Phillips Flat Truss Head (PFTH) style screws. Phillips Bugle Head (PBH) and Phillips Wafer Head (PWH) styles are not covered by this table because they are not intended for attachment of steel to steel.
- 6 The load data in the table is based upon sheet steel with $F_u = 45$ ksi. For $F_u = 55$ ksi steel, multiply values by 1.22. For $F_u = 65$ ksi steel, multiply values by 1.44.
- 7 Refer to Section 3.6.2.5 to ensure drilling capacities.

3.6.2.4 Installation Instructions

For general discussion of Hilti screw fastener installation, reference Section 3.6.1.7.

For allowable diaphragm shear loads and stiffness values for steel roof or floor deck utilizing Hilti self-drilling screws as frame or sidelap fasteners, reference Section 3.5 and

download Hilti's Profis DF software at www.us.hilti.com/ decking (US), or www.hilti.ca (Canada).

To estimate the number of sidelap screws on a steel roof or floor deck project, reference Section 3.5.1.6.

Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

3.6.2 Self-Drilling Screws

3.6.2.5 Ordering Information



Collated Self-Drilling Screws

Light/Medium Gauge Metal Applications (Sidelap)

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-SLC 01 M HWH Collated	5/8"	0.018"	0.095"	3/32"	0.100"	5/16"	Zinc-2	250
S-SLC 02 M HWH Collated	3/4"	0.028"	0.120"	3/8"	0.375"	5/16"	Zinc-1	250
S-MD 10-16 x 7/8 HWH Collated	3/8"	0.028"	0.120"	3/16"	0.188"	5/16"	Zinc-1	250

Medium/Heavy Gauge Metal Applications (Frame Fastener)

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 10-16 x 3/4 HWH#3 Collated	1/2"	0.110"	0.175"	3/8"	0.375"	5/16"	Zinc-1	250
S-MD 12-24 x 7/8 HWH#4 Collated	1/2"	0.175"	0.312"	3/8"	0.375"	5/16"	Zinc-1	250

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Zinc-2 = Cr3 + (Cr6 + free) 8-14 µm. For more information on corrosion resistance, reference Section 3.6.1.6.



Single Self-Drilling Screws

Sidelap (unsupported metal sheets)

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 12-14x1 HHWH Stitch	3/4"	0.028"	0.120"	3/8"	0.375"	5/16"	Zinc-1	3000
S-MD 10-16x7/8 HHWH Pilot Point	3/8"	0.028"	0.120"	3/16"	0.188"	5/16"	Zinc-1	6000
S-MD 1/4-14x7/8 HWH Stitch Kwik-Seal	1/2"	0.028"	0.140"	5/16"	0.313"	5/16"	Kwik-Cote	2500

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Kwik Cote = Proprietary Coating, Section 3.6.2.2 For more information on corrosion resistance, reference Section 3.6.1.6.

Self-Drilling Screws 3.6.2

Light Gauge Applications: Steel to Steel

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 8-18x1/2 HWH #2	1/4"	0.035"	0.100"	1/8"	0.125"	1/4"	Zinc-1	1000
S-MD 8-18x3/4 HWH #2	1/2"	0.035"	0.100"	3/8"	0.375"	1/4"	Zinc-1	1000
S-MD 8-18x1/2 PPH #2	1/4"	0.035"	0.100"	1/8"	0.125"	PHL #2	Zinc-1	1000
S-MD 10-16x1/2 HWH #2	5/16"	0.035"	0.110"	3/16"	0.188"	5/16"	Zinc-1	8500
S-MD 10-16x3/4 HWH #2	1/2"	0.035"	0.110"	5/16"	0.313"	5/16"	Zinc-1	6500
S-MD 10-16x1 HWH #2	3/4"	0.035"	0.110"	1/2"	0.500"	5/16"	Zinc-1	5000

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F For more information on corrosion resistance, reference Section 3.6.1.6.

Light / Medium Gauge Metal Applications

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 10-16x5/8 HWH #3	5/16"	0.110"	0.175"	3/16"	0.187"	5/16"	Zinc-1	7500
S-MD 10-16x3/4 HWH #3	1/2"	0.110"	0.175"	3/8"	0.375"	5/16"	Zinc-1	6500
S-MD 10-16x3/4 HHWH #3	1/2"	0.110"	0.175"	3/8"	0.375"	5/16"	Zinc-1	6500
S-MD 10-16x1 HWH #3	3/4"	0.110"	0.175"	5/8"	0.625"	5/16"	Zinc-1	5000
S-MD 10-16x1 1/4 HWH #3	1"	0.110"	0.175"	7/8"	0.875"	5/16"	Zinc-1	4000
S-MD 10-16x1 1/2 HWH #3	1-1/4"	0.110"	0.175"	1-1/8"	1.125"	5/16"	Zinc-1	4000
S-MD 10-16x5/8 PPH #3	5/16"	0.110"	0.175"	5/16"	0.313"	PHL #2	Zinc-1	7500
S-MD 10-16x3/4 PPH #3	1/2"	0.110"	0.175"	3/8"	0.375"	PHL #2	Zinc-1	6500
S-DD 10-16x5/8 PPCH #3	1/2"	0.110"	0.175"	5/16"	0.313"	PHL #2	Zinc-1	7500
S-DD 10-12x3/4 PPTH #3	9/16"	0.110"	0.175"	3/8"	0.375"	PHL #2	Zinc-1	7500
S-DD 10-18x3/4 PTH #3	9/16"	0.110"	0.175"	3/8"	0.375"	PHL #2	Zinc-1	5000
S-MD 12-14x3/4 HWH #3	1/2"	0.110"	0.210"	5/16"	0.313"	5/16"	Zinc-1	5000
S-MD 12-14x1 HWH #3	3/4"	0.110"	0.210"	9/16"	0.562"	5/16"	Zinc-1	3000
S-MD 12-14x1 1/2 HWH #3	1-1/4"	0.110"	0.210"	1-1/16"	1.062"	5/16"	Zinc-1	2500
S-MD 12-14x2 HWH #3	1-5/8"	0.110"	0.210"	1-9/16"	1.562"	5/16"	Zinc-1	2000
S-DD 12-14x1 TPCH #3	11/16"	0.110"	0.210"	1/2"	0.500"	TX 25 HF	Zinc-2	7500
S-MD 1/4-14x3/4 HWH #3	1/2"	0.110"	0.220"	5/16"	0.313"	3/8"	Zinc-1	4000
S-MD 1/4-14x1 HWH #3	3/4"	0.110"	0.220"	9/16"	0.562"	3/8"	Zinc-1	3000
S-MD 1/4-14x1 1/2 HWH #3	1-1/4"	0.110"	0.220"	1-1/16"	1.062"	3/8"	Zinc-1	2000
S-MD 1/4-14x2 HWH #3	1-5/8"	0.110"	0.220"	1-9/16"	1.562"	3/8"	Zinc-1	1000
S-MD 12-14x3/4 HWH #3 Kwik-Seal	1/4"	0.110"	0.210"	1/8"	0.125"	5/16"	Kwik-Cote	3000
S-MD 12-14x1 HWH #3 Kwik-Seal	5/8"	0.110"	0.210"	3/8"	0.375"	5/16"	Kwik-Cote	2500
S-MD 12-14x1 1/4 HWH #3 Kwik-Seal	1"	0.110"	0.210"	5/8"	0.625"	5/16"	Kwik-Cote	2000
S-MD 12-14x1 1/2 HWH #3 Kwik-Seal	1-1/4"	0.110"	0.210"	7/8"	0.875"	5/16"	Kwik-Cote	2000
S-MD 12-14x2 HWH #3 Kwik-Seal	1-1/2"	0.110"	0.210"	1-3/8"	1.375"	5/16"	Kwik-Cote	1500
S-MD 1/4-14x1 HWH #3 Kwik-Seal	5/8"	0.110"	0.220"	3/8"	0.375"	3/8"	Kwik-Cote	2000
S-MD 1/4-14x1 1/2 HWH #3 Kwik-Seal	1"	0.110"	0.220"	7/8"	0.875"	3/8"	Kwik-Cote	1500

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Zinc-2 = Cr3+ (Cr6+ free) 8-14 µm, Kwik-Cote = Proprietary Coating, Section 3.6.2.2. For more information on corrosion resistance, reference Section 3.6.1.6.

Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

3.6.2 Self-Drilling Screws

Single Self-Drilling Screws – Heavy Gauge Metal Applications

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 12-24x7/8 HWH #4	1/2"	0.175"	0.250"	3/8"	0.375"	5/16"	Zinc-1	4500
S-MD 12-24x1 1/4 HWH #4	3/4"	0.175"	0.250"	5/8"	0.625"	5/16"	Zinc-1	3500
S-MD 12-24x1 1/4 HWH #5	1/2"	0.250"	0.500"	7/16"	0.437"	5/16"	Zinc-1	4000
S-MD 12-24x1 1/4 HWH #5 Kwik-Cote	1/2"	0.250"	0.500"	5/16"	0.313"	5/16"	KwikCote	4000
S-MD 12-24x2 HWH #5 Kwik-Cote	1-1/4"	0.250"	0.500"	1-3/16"	1.187"	5/16"	KwikCote	2000
S-MD 12-24x3 HWH #5 Kwik-Cote	2-1/4"	0.250"	0.500"	2-3/16"	2.187"	5/16"	KwikCote	1000
S-MD 12-24x1 1/4 HWH #5 Kwik-Cote Bond Washer	1/2"	0.250"	0.500"	5/16"	0.313"	5/16"	KwikCote	2500

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Kwik Cote = Proprietary Coating, Section 3.6.2.2. For more information on corrosion resistance, reference Section 3.6.1.6.

Single Self-Drilling Screws – Heavy Gauge Metal Applications

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
Wood Drill Screws								
Decking Screws (Plywood to Framing)								
S-WD 8-18x1 5/16 PFH #3	1/2"	0.050"	0.140"	1/2"	0.500"	PHL #2	BP	6000
S-WD 8-18x1 15/16 PFH #3	5/8"	0.050"	0.140"	3/4"	0.750"	PHL #2	BP	4000
S-WD 10-24x1 PWH #3	3/4"	0.050"	0.175"	5/8"	0.625"	PHL #2	Zinc-1	6000
S-WD 10-24x1 1/4 PWH #3	1"	0.050"	0.175"	7/8"	0.875"	PHL #2	Zinc-1	5000
S-WD 10-24x1 1/2PWH #3	1-1/4"	0.050"	0.175"	1-1/8"	1.125"	PHL #2	Zinc-1	3500
Winged Reamer Wood Drill Screws								
S-WW 10-24x1 7/16 PWH #3 wings	1"	0.050"	0.175"	3/4"	0.750"	PHL #2	Zinc-1	4000
S-WW 12-24x2 PFH #4 wings	1-3/8"	0.050"	0.232"	1-1/4"	1.250"	PHL #2	Zinc-1	2000
S-WW 12-24x2 1/2 PFH #4 wings	2"	0.050"	0.232"	1-3/4"	1.750"	PHL #2	Zinc-1	1500
S-WW 14-20x2 3/4 PFH #4 wings	2-1/4"	0.050"	0.250"	2"	2.000"	PHL #2	Zinc-1	1000

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; BP = Black Phosphate. For more information on corrosion resistance, reference Section 3.6.1.6.

Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

Self-Drilling Screws 3.6.2

Drywall Applications (Drywall to steel, framing and lathing screws)

Description	Coating ¹	Box Qty	Application
6 x 1 PBH SD	DGP	10,000	Fastening Drywall, plywood, insulation, etc. to metal studs from 14 ga to 20 ga
6 x 1 PBH SD Zinc	Zinc-1	10,000	
6 x 1-1/8 PBH SD	DGP	10,000	
6 x 1-1/8 PBH SD Zinc	Zinc-1	10,000	
6 x 1-1/4 PBH SD	DGP	8,000	
6 x 1-1/4 PBH SD Zinc	Zinc-1	8,000	
6 x 1-5/8 PBH SD	DGP	5,000	
6 x 1-5/8 PBH SD Zinc	Zinc-1	5,000	
6 x 1-7/8 PBH SD	DGP	4,000	
6 x 1-7/8 PBH SD Zinc	Zinc-1	4,000	
8 x 2-3/8 PBH SD	BP	2,500	
8 x 2-3/8 PBH SD Zinc	Zinc-1	2,500	
8 x 2-5/8 PBH SD	BP	1,600	
8 x 2-5/8 PBH SD Zinc	Zinc-1	1,600	
8 x 3 PBH SD	BP	1,400	
8 x 3 PBH SD Zinc	Zinc-1	1,400	
7 x 7/16 PPFH SD Framers	BP	10,000	Fastening stud to track from 14 ga to 20 ga
7 x 7/16 PPFH SD Framers Zinc	Zinc-1	10,000	
8 x 1/2 PPH SD Framers Zinc	Zinc-1	10,000	
10 x 5/8 PPCH SD Framers	Zinc-1	7,500	
10 x 3/4 PFTH SD Framers Zinc	Zinc-1	7,500	
10 x 3/4 PTH SD Framers Zinc	Zinc-1	5,000	
8 x 1/2 PTH SD Lathing Zinc	Zinc-1	10,000	Fastening wire lath to 14 ga to 20 ga
8 x 3/4 PTH SD Lathing Zinc	Zinc-1	10,000	
8 x 1 PTH SD Lathing Zinc	Zinc-1	8,000	
8 x 1-1/4 PTH SD Lathing Zinc	Zinc-1	8,000	
6 x 1-5/8 SFH SD	DGP	5,000	Fastening wood trim and base to 14 ga to 20 ga studs
6 x 2-1/4 SFH SD Zinc	Zinc-1	3,000	

¹ For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; BP = Black Phosphate; DGP = Dark Grey Phosphate. For more information on corrosion resistance, reference Section 3.6.1.6.

The importance of IBC compliant screws.

ICC-ES ESR-2196 provides IBC recognition of Hilti's Self-Drilling Screw Fasteners. This recognition was based on a comprehensive and rigorous independent evaluation of Hilti's Self-Drilling Screw Fasteners to the latest IBC code requirements in ICC-ES AC118 Acceptance Criteria for Self-Tapping Screw Fasteners, as well as the AISI S904 and AISI S905 test standards.

AC118 provides the IBC code recognition and quality assurance for screw fasteners. ICC-ES ESR-2196 recognizes many types of Hilti screws for the most common applications including CFS connections, gypsum to CFS, etc. Specifically, ESR-2196 covers the HWH, HHWH, PPH, PPFH, PBH, PWH, PTH, PPCH, TPCH and PFTH head style Hilti screws.

To ensure IBC compliance of screws on your next project, reference ESR-2196.





The following excerpt are pages from the North American Product Technical Guide, Volume 1: Direct Fastening, Edition 15.

Please refer to the publication in its entirety for complete details on this product including data development, product specifications, general suitability, installation, corrosion and spacing and edge distance guidelines.

US & CA: <http://submittals.us.hilti.com/PTGVol1/>

To consult directly with a team member regarding our direct fastening products, contact Hilti's team of technical support specialists between the hours of 7:00am – 6:00pm CST.

US: 877-749-6337 or HNATechnicalServices@hilti.com



CA: 1-800-363-4458, ext. 6 or CATechnicalServices@hilti.com

Hilti, Inc.
7250 Dallas Parkway, Suite 1000
Plano, TX 75024

1-800-879-8000
www.hilti.com


3.6.1 Self-Drilling Screw Fastener Selection and Design

3.6.1.1 Drill Point Selection

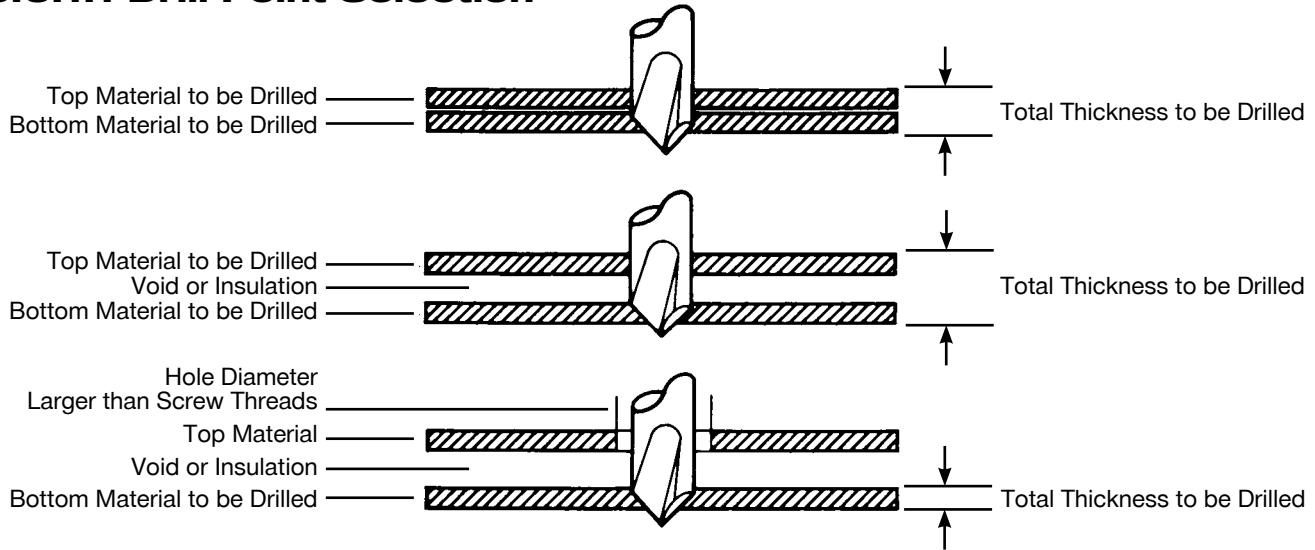


Drill Flute
The length of the drill flute determines the metal thickness that can be drilled. The flute itself provides a channel for chip removal during

drilling action. If it becomes completely embedded in material, drill chips will be trapped in the flute and cutting action will cease. This will cause the point to burn up or break.



Point Length
The unthreaded section from the point to the first thread should be long enough to assure the drilling action is complete before the

first thread engages the drilled metal. Screw threads advance at a rate of up to ten times faster than the drill flute can remove metal. All drilling therefore should be complete before threads begin to form.



Drilling Through Wood to Metal
If your application calls for drilling through wood over 1/2" thick, a clearance hole is required. Select a fastener with

breakaway wings for this type of job. The wings will ream a clearance hole and break-off when they contact metal surface (minimum metal thickness 0.06") to be drilled.

Drilling Capacity – Material Thickness Recommendations (Steel to Steel)

Thickness of material to be drilled (in.)	#2 Point		#3 Point				#4 Point		#5 Point
									0.500
0.500									
0.400									
0.300									
0.200					0.210	0.220	0.250	0.250	
0.100	0.100	0.110	0.140	0.175			0.175	0.175	0.250
0.035			0.100	0.110	0.110	0.110			
Screw Diameter	#6, #8	#10	#8	#10	#12	#14	#12	#14	#12

Note: Meets or exceeds ASTM C1513. Shaded areas represent total thickness of all steel including any void spaces between layers.

Self-Drilling Screw Fastener Selection and Design 3.6.1

3.6.1.2 Thread Selection

Metal Gauge

Gauge	Aluminum Metal	Sheet
	(Approx. Thickness in decimal parts of an inch)	
8	0.1285	0.1644
9	0.1144	0.1495
10	0.1019	0.1345
11	0.0907	0.1196
12	0.0808	0.1046
13	0.0720	0.0897
14	0.0641	0.0747
15	0.0571	0.0673
16	0.0508	0.0598
17	0.0493	0.0538
18	0.0403	0.0474
19	0.0359	0.0418
20	0.0320	0.0358
21	0.0285	0.0329
22	0.0253	0.0295
23	0.0226	0.0269
24	0.0201	0.0239
25	0.0179	0.0209
26	0.0159	0.0179
27	0.0142	0.0164
28	0.0126	0.0149

Fraction to Decimal


Fraction (in.)	Decimal Equivalent (in.)
1/64	0.015
1/32	0.031
3/64	0.046
1/16	0.062
5/64	0.078
3/32	0.093
7/64	0.109
1/8	0.125
9/64	0.140
5/32	0.156
11/64	0.171
3/16	0.187
13/64	0.203
7/32	0.218
15/64	0.234
1/4	0.250

Screw Diameter

Number	Decimal Equivalent (in.)
#6	0.1380
#7	0.1510
#8	0.1640
#10	0.1900
#12	0.2160
1/4	0.2500
5/16	0.3125


Thread Length

Always choose a fastener with sufficient threads to fully engage in the base metal. For attachments to 1/4" base steel, a self-drilling screw should have at least 1/4" of threads. It is helpful, but not critical, that the threads also engage in the material being fastened. The head of the fastener provides the bearing force for the material being fastened, while the threads provide the clamping force in the base material.

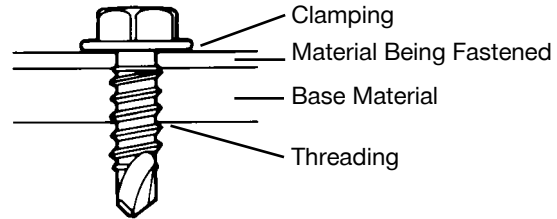


Thread Pitch

The thickness of material being fastened and diameter of the screw determine the type of thread pitch to be used. In general, the thinner the fastened materials, the fewer the number of threads. The thicker the material, the greater the number of threads. This principle is due to two primary methods of thread engagement/holding power: **Clamping** and **Threading**. In light gauge metal, the materials are actually being clamped together by the upper and lower threads.

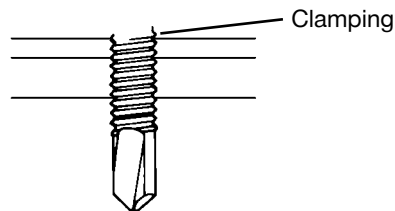

Thinner base material requires a coarser thread pitch to assure proper clamping. The thicker the material, the finer the threads must be. In very thick metal (3/8" to 1/2" thick), a fine thread is advisable. This will allow the thread to tap into the base material with less installation torque than a coarse thread.

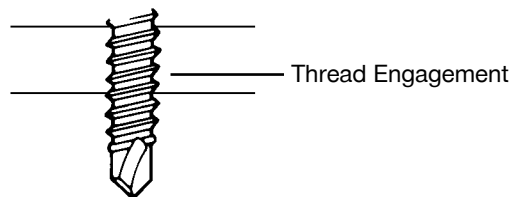

The importance of IBC compliant screws.

ICC-ES ESR-2196 provides IBC recognition of Hilti's Self-Drilling Screw Fasteners. This recognition was based on a comprehensive and rigorous independent evaluation of Hilti's Self-Drilling Screw Fasteners to the latest IBC code requirements in ICC-ES AC118 Acceptance Criteria for Self-Tapping Screw Fasteners, as well as the AISI S904 and AISI S905 test standards.

AC118 provides the IBC code recognition and quality assurance for screw fasteners. ICC-ES ESR-2196 recognizes many types of Hilti screws for the most common applications including CFS connections, gypsum to CFS, etc. Specifically, ESR-2196 covers the HWH, HHWH, PPH, PPFH, PBH, PWH, PTH, PPCH, TPCH and PFTH head style Hilti screws.

To ensure IBC compliance of screws on your next project, reference ESR-2196.



3.6.1 Self-Drilling Screw Fastener Selection and Design

3.6.1.3 Head Style Selection



HWH (HHWH)
(High) Hex Washer Head : Washer face provides a bearing surface for the driving sockets.



PPH (PPFH)
Phillips Pan (Framing) Head: Conventional head for general applications and provides low profile fastening.



PFH
Phillips Flat Head: Used primarily in wood to countersink and seat flush without splintering the wood.



PWH
Phillips Wafer Head: Large head provides the bearing surface necessary to seat flush in soft materials.



PBH
Phillips Bugle Head: Used primarily for fastening drywall, plywood or insulation board to steel studs.



PTH (MPTH)
(Modified) Phillips Truss Head: Large head and low profile provides surface area needed to attach wire lath to metal stud.



PPCH
Phillips Pancake Conventional Head: Head for general applications and provides low and flat profile.



PFTH
Phillips Flat Truss Head: Lowest profile head available for attaching metal to metal.



PFHUC
Pancake Framing Head Undercut: Used for countersinking where a full head taper would cause stand-off of the screw.



SHWH
Slotted Hex Washer Head: Hex washer head with slot in center to provide additional drive connection.

3.6.1.4 Sealing Criteria

Sealing washer screws offer weather resistant fastenings where moisture or condensation is a factor. The washer helps seal the hole to help prevent moisture from dripping into the fastener threads from the fastened material side, reducing corrosive build-up. As added protection against corrosion, all sealing washer screws come standard with Kwik-Cote coating. The torque control or depth gauge of the electric screwdrivers help ensure that the optimal seal is applied (Reference Section 3.6.1.7).




3.6.1.5 Length Selection

Length of the screw (L)

Depending on the screwhead, there are two different ways to measure the overall length of a screw.

For HWH/HHWH, PPH, PTH, PFTH, SHWH and PPCH screws, the overall length is measured from the bottom of the washer under the head to the point of the screw.


For PWH, PFH, PBH and PFHUC screws, the overall length is measured from the top of the head to the point of the screw.

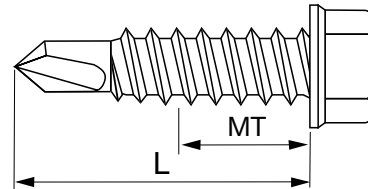

Maximum Total Thickness (MT)

The maximum total thickness (MT) for all screws is the length of the threads reduced by the first three threads (protruding past the back-side of the base material). See drawings above and below.

The maximum total thickness (MT) describes the maximum thickness of all attachments to be fastened plus the base material.

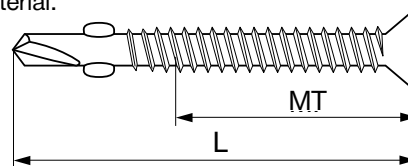

Self-Drilling Screw Fastener Selection and Design 3.6.1

3.6.1.6 Corrosion Resistance Guidelines

Self-Drilling Screw Fastener Selection Guidelines^{1,2,3,6,7}

Environment	Low Indoor - Dry: no moisture exposure		Medium Indoor and Exterior - Dry: minimal moisture exposure		High Indoor and Exterior - Wet: Heavy industrial or coastal areas with high prolonged moisture levels but no direct exposure to chlorides, and average temperatures below 86 °F (30 °C).	
Connection Type	Untreated Lumber-to-steel, steel-to-steel, gypsum-to-steel applications	Pressure-Treated ⁴ or Fire-Retardant Lumber-to-steel; aluminum-to-steel; dissimilar metals	Untreated Lumber-to-steel, steel-to-steel, gypsum-to-steel applications; cement board-to-steel	Pressure-Treated ⁴ or Fire-Retardant Lumber-to-steel; aluminum-to-steel; dissimilar metals	Untreated Lumber-to-steel, steel-to-steel, gypsum-to-steel applications	Pressure-Treated ⁴ or Fire-Retardant Lumber-to-steel; aluminum-to-steel; dissimilar metals
Screw Fastener Descriptions	Hardened Carbon Steel fasteners with electro-galvanized (min. 5 - 13 microns), black phosphate coatings	Carbon Steel, two-step heat treated fasteners with Kwik-Cote coating	Hardened Carbon Steel fasteners with Kwik-Cote coating	Carbon Steel, two-step heat treated fasteners with Kwik-Cote coating	300 series ⁵ stainless steel fastener	
Screw Fastener Designation	Hilti Zinc Plated Screws	Hilti Kwik-Flex	Hilti Self-Drilling Screws with Kwik-Cote or Kwik-Seal Designation	Hilti Kwik-Flex	Hilti Bi-Metal Kwik-Flex	
Product Technical Guide Section	Section 3.6.2 or 3.6.3	Section 3.6.4	Section 3.6.2	Section 3.6.4	Section 3.6.5	

- 1 If the moisture content of Pressure-Treated Lumber is high (> 18%) or unknown, stainless steel fasteners are recommended. Select appropriate stainless steel grade for your application.
- 2 Guidelines based on fastener coating / material resistance to environmental corrosion (commonly called rusting) and fastener hardening process / resistance to hydrogen assisted stress corrosion cracking (HASCC). Evaluate site conditions which may affect these guidelines, such as: corrosive agents other than those listed; expected service life; other (non-environmental) types of corrosion, etc.
- 3 In highly corrosive environments (such as direct exposure to chlorides with average temperatures above 86 °F (30 °C)) it is generally recommended that a Highly Corrosive Resistant (HCR) fastener be used. Contact Hilti Technical Support at 877-749-6337 for more information.
- 4 Pressure treated lumber refers to lumber such as SBX/DOT, Zinc borated ACQ, CA-B, CBA-A treated lumber.
- 5 Most 400 series stainless steels, such as 410 stainless steel, 410 super-passivated stainless steel and 400 modified stainless steel are generally considered susceptible to HASCC. Moreover, these grades of stainless steel are 18/0 – they contain chromium but no nickel which reduces corrosion resistance significantly when compared to 18/8 grades (302, 304) or 18/8/2 grade (316).
- 6 The decision as to which fastener optimally meets the demands of a specific application is ultimately the judgment of the Engineer of Record or other responsible person for the project.
- 7 Reference Section 2.3.3.1 for more information on corrosion resistance.

3.6.1 Self-Drilling Screw Fastener Selection and Design

3.6.1.7 Hilti Screw Fastener Installation Instructions*

It is essential that proper rpm, setting depth and torque be utilized when installing Hilti screws.

Install self-drilling screws perpendicular to the work surface. The self-drilling feature of the screw will drill a hole completely through the base material before tapping the threads. Do not apply excessive pressure. Too much pressure will slow the speed of the screwdriver, increasing the installation time and possibly leading to drill tip failure. The variable speed motors of Hilti screwdrivers enable the operator to start the screw in a precise position and drive it at the speed best suited for the application. Below, two recommended tools are discussed in detail. The tables below provide additional suggested tools as well as common socket and bit sizes.

Common Socket and Bit Sizes

Screw Size	Magnetic Nut Setter Size	Phillips Bit Size
#8	1/4"	2
#10	5/16"	2
#12	5/16"	3
1/4"	3/8"	3

The Hilti SD 2500 siding edition features a 2,500 rpm motor for fastening self-drilling screws in steel up to 1/4" (6 mm) thick. There is a depth gauge on the front of the tool for correct depth setting of screws.

The Hilti ST 1800 heavy duty torque adjustable screwdriver features a 1,800 rpm for fastening self-drilling screws in steel up to 1/2" (12 mm) thick. There is a depth gauge on the front of the tool for correct depth setting of screws. There is also an 18 position adjustable torque clutch for correct torque release setting of screws. By avoiding overdriving, proper torque adjustment will deliver consistent fastening quality.

The ST 1800 may also be operated with the SDT 5 for a stand-up decking system to fasten steel deck.

Please reference the table on torque considerations below for more information on proper installation of Hilti screw fasteners.

* These are abbreviated instructions which may vary by application. **ALWAYS** review/follow the instructions accompanying the product.

Torque Considerations for Screw Fastening Applications³

	Soft joint applications	Hard joint applications
Applications	These include, but are not limited to, typical applications involving interior drywall fastening, exterior sheathing, metal framing, HVAC duct and plywood to metal.	These include, but are not limited to, typical applications involving metal decking (both frame and sidelap), metal siding (both frame and sidelap), exterior façade and window glazing as well as any application where stripping of the base material may occur. Any application involving sealing washers requires a depth gauge or torque clutch to help ensure that an optimal seal is achieved.
Considerations ¹	These applications may not require a corded or cordless screwdriver that features either an adjustable torque clutch or a properly adjusted depth gauge. This is because the applications are considered non-structural and/or possess sufficient redundancy in fastening points that any impact of over-driving may be sufficiently mitigated.	These applications must utilize a corded or cordless screwdriver that features either an adjustable torque clutch or a properly adjusted depth gauge in order to ensure consistent fastening and achieve published connection capacities. This is because the applications are considered structural elements of the design. Over-driving may cause connection failures or fastener failures that possibly compromise the integrity of the connection.
Suggested Tools ²	Corded: SD 2500, SD 4500, ST 1800, SD 2500 Siding Edition, SI 100 Cordless: SF/H 14, SF/H 18, SD 4500-A, SID 144, SIW 144	Corded: SD 2500, SD 4500, ST 1800, SD 2500 Siding Edition Cordless: SF/H 14, SF/H 18, SD 4500-A Do not use impact drivers.

1 Whether an application requires a depth gauge or torque clutch is the judgment of the person responsible for the project. If conditions are unknown or in doubt, use a screwdriver that features either an adjustable torque clutch or a properly adjusted depth gauge.

2 All published screw fastening connection capacities were developed using corded or cordless screwdriver tools with adjustable torque clutches. Over-driving a screw fastener can cause a connection failure in lighter gauge and lower strength steel base materials (the threads tapping the base material are stripped by excessive torque) or a fastener failure in heavier gauge and higher strength steel base materials (the screw is damaged or sheared by excessive torque). This type of damage is not always visually detectable. Regardless of the tool or its torque setting, test fastenings should always be performed to verify the appropriate torque is being applied.

3 For additional information, contact Hilti Technical Services at 877-749-6337.

Self-Drilling Screws 3.6.2

3.6.2.1 Product Description

Hilti self-drilling screws are designed to drill their own hole in steel base materials up to 1/2" thick. These screws are available in a variety of head styles, thread lengths and drill-flute lengths for screw diameters #6 through 1/4". Hilti self-drilling screws meet ASTM C1513, ASTM C954 and SAE J78 standards, as applicable.

Product Features:

- Hex head for metal-to-metal applications
- Flush head for wood-to-metal applications
- For metal from 0.035" to 0.500" thick
- Winged reamers for wood over 1/2" thick
- Stitch screws for light gauge metal-to-metal
- Sealing screws for water resistant fastenings

3.6.2.1 Product Description

3.6.2.2 Material Specifications

3.6.2.3 Technical Data

3.6.2.4 Installation Instructions

3.6.2.5 Ordering Information



3.6.2.2 Material Specifications

Material	ASTM A510 Grade 1018-1022
Heat Treatment	Case hardened and tempered <ul style="list-style-type: none"> • Sizes 8, 10 and 12: 0.004" to 0.009" case depth • Size 1/4": 0.005" to 0.011" case depth
Plating	Refer to Section 3.6.2.5 for screw coating information.

Listings/Approvals

ICC-ES (International Code Council)
ESR-2196
COLA (City of Los Angeles)
RR 25678



Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

ICC-ES ESR-2196, provides IBC recognition of Hilti's Self-Drilling Screw fasteners for most common applications (e.g. CFS connections, gypsum to CFS, etc.), including HWH, HHWH, PPH, PPFH, PBH, PWH, PTH, PPCH, TPCH and PFTH head style screws.

3.6.2.3 Technical Data

Ultimate Tensile Strengths – Pullout (Tension), lb (kN)^{1,2,3,4,5,6,7}

Screw Designation	Nominal Diameter in.	Thickness of steel member not in contact with the screw head, ga (in.)					
		20 (0.036)	18 (0.048)	16 (0.060)	14 (0.075)	12 (0.105)	10 (0.135)
#6	0.138	190 (0.85)	250 (1.11)	320 (1.42)	395 (1.76)	555 (2.47)	715 (3.18)
#7	0.151	210 (0.93)	275 (1.22)	345 (1.53)	435 (1.93)	605 (2.69)	780 (3.47)
#8	0.164	225 (1.00)	300 (1.33)	375 (1.67)	470 (2.09)	660 (2.94)	845 (3.76)
#10	0.190	260 (1.16)	350 (1.56)	435 (1.93)	545 (2.42)	765 (3.40)	980 (4.36)
#12	0.216	295 (1.31)	395 (1.76)	495 (2.20)	620 (2.76)	870 (3.87)	1120 (4.98)
1/4 in.	0.250	345 (1.53)	460 (2.05)	575 (2.56)	715 (3.18)	1000 (4.45)	1290 (5.74)

1 The lower of the ultimate pullout, pullover, and tension fastener strength of screw should be used for design.
 2 Load values based upon calculations done in accordance with Section E4 of the AISI S100.
 3 AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
 4 ANSI/ASME standard screw diameters were used in the calculations and are listed in the tables.
 5 The screw diameters in the table above are available in head styles of pan, hex washer, pancake, flat, wafer and bugle.
 6 The load data in the table is based upon sheet steel with $F_u = 45$ ksi. For $F_u = 55$ ksi steel, multiply values by 1.22. For $F_u = 65$ ksi steel, multiply values by 1.44.
 7 Refer to Section 3.6.2.5 to ensure drilling capacities.

3.6.2 Self-Drilling Screws

Ultimate Tensile Strengths – Pullover (Tension), lb (kN)^{1,2,3,4,5,6,7}

Screw Designation	Washer or Head Diameter in.	Thickness of steel member in contact with the screw head, ga (in.)						
		22 (0.030)	20 (0.036)	18 (0.048)	16 (0.060)	14 (0.075)	12 (0.105)	10 (0.135)
Hex Washer Head (HWH)								
#8	0.335	675 (3.00)	815 (3.63)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#10	0.399	805 (3.58)	970 (4.31)	1290 (5.74)	1370 (6.09)	1370 (6.09)	1370 (6.09)	1370 (6.09)
#12-14	0.415	835 (3.71)	1010 (4.49)	1340 (5.96)	1680 (7.47)	2100 (9.34)	2325 (10.34)	2325 (10.34)
#12-24	0.415	835 (3.71)	1010 (4.49)	1340 (5.96)	1680 (7.47)	2100 (9.34)	2940 (13.08)	3780 (16.81)
1/4 in.	0.500	1010 (4.49)	1220 (5.43)	1620 (7.21)	2030 (9.03)	2530 (11.25)	3540 (13.75)	4560 (20.28)
Phillips Pan Head (PPH)								
#7	0.303	615 (2.74)	735 (3.27)	980 (4.36)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#8	0.311	630 (2.80)	755 (3.36)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#10	0.364	740 (3.29)	885 (3.94)	1180 (5.25)	1370 (6.09)	1370 (6.09)	1370 (6.09)	1370 (6.09)
Phillips Truss Head (PTH)								
#8	0.433	875 (3.89)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)	1000 (4.45)
#10	0.411	830 (3.69)	1000 (4.45)	1330 (5.92)	1390 (6.18)	1390 (6.18)	1390 (6.18)	1390 (6.18)
Phillips Pancake Head (PPCH)								
#10, #12	0.409	830 (3.69)	995 (4.43)	1325 (5.89)	1370 (6.09)	1370 (6.09)	1370 (6.09)	1370 (6.09)
Phillips Flat Truss Head (PFTH)								
#10	0.364	740 (3.29)	885 (3.94)	1180 (5.25)	1475 (6.56)	1840 (8.18)	2170 (9.65)	2170 (9.65)

1. The lower of the ultimate pullout, pullover, and tension fastener strength of screw should be used for design.
2. Load values based upon calculations done in accordance with Section E4 of the AISI S100.
3. AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
4. ANSI/ASME standard screw head diameters were used in the calculations and are listed in the tables.
5. Phillips Bugle Head (PBH) and Phillips Wafer Head (PWH) styles are not covered by this table because they are not intended for attachment of steel to steel.
6. The load data in the table is based upon sheet steel with $F_u = 45$ ksi. For $F_u = 55$ ksi steel, multiply values by 1.22. For $F_u = 65$ ksi steel, multiply values by 1.44.
7. Refer to Section 3.6.2.5 for drilling capacities.

Nominal Ultimate Fastener Strength of Screw

Screw Designation	Nominal Diameter (in.)	Nominal Fastener Strength	
		Tension, P_{ts} lb (kN) ¹	Shear, P_{ss} lb (kN) ^{2,3,4}
#6-20	0.138	1000 (4.45)	890 (3.96)
#7-18	0.151	1000 (4.45)	890 (3.96)
#8-18	0.164	1000 (4.45)	1170 (5.20)
#10-12	0.190	2170 (9.65)	1645 (7.32)
#10-16	0.190	1370 (6.09)	1215 (5.40)
#10-18	0.190	1390 (6.18)	1645 (7.32)
#12-14	0.216	2325 (10.34)	1880 (8.36)
#12-24	0.216	3900 (17.35)	2285 (10.16)
1/4 in.	0.250	4580 (20.37)	2440 (10.85)

- 1 The lower of the ultimate pullout, pullover, and tension fastener strength of screw should be used for design. The Pullout and Pullover tables in this section have already been adjusted where screw strength governs.
- 2 The lower of the ultimate shear fastener strength and shear bearing should be used for design. The Shear Bearing table in this section has already been adjusted where screw strength governs.
- 3 AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
- 4 When the distance to the end of the connected part is parallel to the line of the applied force the allowable shear fastener strength must be reduced for end distance, when necessary, in accordance with E4.3.2 of Appendix A of AISI S100.

Torsional Strength^{1,2}

Size	Min. Torsional Strength in-lb (Nm)	
6-20	24	(2.7)
7-18	38	(4.3)
8-18	42	(4.8)
10-12	61	(6.9)
10-16	61	(6.9)
10-18	61	(6.9)
10-24	65	(7.3)
12-14	92	(10.4)
12-24	100	(11.3)
1/4-14	150	(17.0)
1/4-20	156	(17.6)

- 1 Based on screw only. Does not consider base material limitations.
- 2 Values in table are ultimate torsional strengths. To obtain maximum setting torque, multiply values in table by 0.66.

Self-Drilling Screws 3.6.2

Ultimate Shear Strengths – Bearing (Shear), lb (kN)^{1,2,3,4,5,6,7}

Screw Designation	Nominal Diameter in.	Thickness of steel member in contact with screw head ga (in.)	Thickness of steel member not in contact with the screw head, ga (in.)				
			20 (0.036)	18 (0.048)	16 (0.060)	14 (0.075)	≥ 12 (0.105)
#7	0.151	20 (0.036)	500 (2.22)	660 (2.94)	660 (2.94)	660 (2.94)	660 (2.94)
		18 (0.048)	500 (2.22)	660 (2.94)	880 (3.91)	880 (3.91)	880 (3.91)
		≥ 16 (0.060)	500 (2.22)	660 (2.94)	890 (3.96)	890 (3.96)	890 (3.96)
#8	0.164	20 (0.036)	525 (2.34)	715 (3.18)	715 (3.18)	715 (3.18)	715 (3.18)
		18 (0.048)	525 (2.34)	805 (3.58)	955 (4.25)	955 (4.25)	955 (4.25)
		≥ 16 (0.060)	525 (2.34)	805 (3.58)	1120 (4.98)	1170 (5.20)	1170 (5.20)
#10-12	0.190	20 (0.036)	565 (2.51)	830 (3.69)	830 (3.69)	830 (3.69)	830 (3.69)
		18 (0.048)	565 (2.51)	865 (3.85)	1110 (4.94)	1110 (4.94)	1110 (4.94)
		16 (0.060)	565 (2.51)	865 (3.85)	1210 (5.38)	1390 (6.18)	1390 (6.18)
		≥ 14 (0.075)	565 (2.51)	865 (3.85)	1210 (5.38)	1645 (7.32)	1645 (7.32)
#10-16	0.190	20 (0.036)	565 (2.51)	830 (3.69)	830 (3.69)	830 (3.69)	830 (3.69)
		18 (0.048)	565 (2.51)	865 (3.85)	1110 (4.94)	1110 (4.94)	1110 (4.94)
		≥ 16 (0.060)	565 (2.51)	865 (3.85)	1210 (5.38)	1215 (5.40)	1215 (5.40)
#10-18	0.190	20 (0.036)	565 (2.51)	830 (3.69)	830 (3.69)	830 (3.69)	830 (3.69)
		18 (0.048)	565 (2.51)	865 (3.85)	1110 (4.94)	1110 (4.94)	1110 (4.94)
		16 (0.060)	565 (2.51)	865 (3.85)	1210 (5.38)	1390 (6.18)	1390 (6.18)
		≥ 14 (0.075)	565 (2.51)	865 (3.85)	1210 (5.38)	1645 (7.32)	1645 (7.32)
#12-14	0.216	20 (0.036)	600 (2.67)	930 (4.14)	945 (4.20)	945 (4.20)	945 (4.20)
		18 (0.048)	600 (2.67)	925 (4.11)	1260 (5.60)	1260 (5.60)	1260 (5.60)
		16 (0.060)	600 (2.67)	925 (4.11)	1290 (5.74)	1570 (6.98)	1570 (6.98)
		≥ 14 (0.075)	600 (2.67)	925 (4.11)	1290 (5.74)	1800 (8.00)	1880 (8.36)
#12-24	0.216	20 (0.036)	600 (2.67)	930 (4.14)	945 (4.20)	945 (4.20)	945 (4.20)
		18 (0.048)	600 (2.67)	925 (4.11)	1260 (5.60)	1260 (5.60)	1260 (5.60)
		16 (0.060)	600 (2.67)	925 (4.11)	1290 (5.74)	1570 (6.98)	1570 (6.98)
		14 (0.075)	600 (2.67)	925 (4.11)	1290 (5.74)	1800 (8.00)	1970 (8.76)
		≥ 12 (0.090)	600 (2.67)	925 (4.11)	1290 (5.74)	1800 (8.00)	2285 (10.16)
1/4 in.	0.250	20 (0.036)	645 (2.87)	1020 (4.54)	1090 (4.85)	1090 (4.85)	1090 (4.85)
		18 (0.048)	645 (2.87)	995 (4.43)	1400 (6.23)	1460 (6.49)	1460 (6.49)
		16 (0.060)	645 (2.87)	995 (4.43)	1390 (6.18)	1820 (8.10)	1820 (8.10)
		14 (0.075)	645 (2.87)	995 (4.43)	1390 (6.18)	1940 (8.63)	2280 (10.14)
		≥ 12 (0.090)	645 (2.87)	995 (4.43)	1390 (6.18)	1940 (8.63)	2440 (10.85)

- 1 The lower of the ultimate shear bearing and shear fastener strength of screw should be used for design.
- 2 Load values based upon calculations done in accordance with Section E4 of AISI S100.
- 3 AISI S100 recommends a safety factor of 3.0 be applied for allowable strength design, a Φ factor of 0.5 be applied for LRFD design or a Φ factor of 0.4 be applied for LSD design.
- 4 ANSI/ASME standard screw diameters were used in the calculations and are listed in the tables.
- 5 Load values in table are for Hex Washer Head (HWH and HHWH), Phillips Pan Head (PPH), Phillips Truss Head (PTH), Phillips Pancake Head (PPCH), and Phillips Flat Truss Head (PFTH) style screws. Phillips Bugle Head (PBH) and Phillips Wafer Head (PWH) styles are not covered by this table because they are not intended for attachment of steel to steel.
- 6 The load data in the table is based upon sheet steel with $F_u = 45$ ksi. For $F_u = 55$ ksi steel, multiply values by 1.22. For $F_u = 65$ ksi steel, multiply values by 1.44.
- 7 Refer to Section 3.6.2.5 to ensure drilling capacities.

3.6.2.4 Installation Instructions

For general discussion of Hilti screw fastener installation, reference Section 3.6.1.7.

For allowable diaphragm shear loads and stiffness values for steel roof or floor deck utilizing Hilti self-drilling screws as frame or sidelap fasteners, reference Section 3.5 and

download Hilti's Profis DF software at www.us.hilti.com/ decking (US), or www.hilti.ca (Canada).

To estimate the number of sidelap screws on a steel roof or floor deck project, reference Section 3.5.1.6.

Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

3.6.2 Self-Drilling Screws

3.6.2.5 Ordering Information



Collated Self-Drilling Screws

Light/Medium Gauge Metal Applications (Sidelap)

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-SLC 01 M HWH Collated	5/8"	0.018"	0.095"	3/32"	0.100"	5/16"	Zinc-2	250
S-SLC 02 M HWH Collated	3/4"	0.028"	0.120"	3/8"	0.375"	5/16"	Zinc-1	250
S-MD 10-16 x 7/8 HWH Collated	3/8"	0.028"	0.120"	3/16"	0.188"	5/16"	Zinc-1	250

Medium/Heavy Gauge Metal Applications (Frame Fastener)

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 10-16 x 3/4 HWH#3 Collated	1/2"	0.110"	0.175"	3/8"	0.375"	5/16"	Zinc-1	250
S-MD 12-24 x 7/8 HWH#4 Collated	1/2"	0.175"	0.312"	3/8"	0.375"	5/16"	Zinc-1	250

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Zinc-2 = Cr3 + (Cr6 + free) 8-14 µm. For more information on corrosion resistance, reference Section 3.6.1.6.



Single Self-Drilling Screws

Sidelap (unsupported metal sheets)

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 12-14x1 HHWH Stitch	3/4"	0.028"	0.120"	3/8"	0.375"	5/16"	Zinc-1	3000
S-MD 10-16x7/8 HHWH Pilot Point	3/8"	0.028"	0.120"	3/16"	0.188"	5/16"	Zinc-1	6000
S-MD 1/4-14x7/8 HWH Stitch Kwik-Seal	1/2"	0.028"	0.140"	5/16"	0.313"	5/16"	Kwik-Cote	2500

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Kwik Cote = Proprietary Coating, Section 3.6.2.2 For more information on corrosion resistance, reference Section 3.6.1.6.

Self-Drilling Screws 3.6.2

Light Gauge Applications: Steel to Steel

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 8-18x1/2 HWH #2	1/4"	0.035"	0.100"	1/8"	0.125"	1/4"	Zinc-1	1000
S-MD 8-18x3/4 HWH #2	1/2"	0.035"	0.100"	3/8"	0.375"	1/4"	Zinc-1	1000
S-MD 8-18x1/2 PPH #2	1/4"	0.035"	0.100"	1/8"	0.125"	PHL #2	Zinc-1	1000
S-MD 10-16x1/2 HWH #2	5/16"	0.035"	0.110"	3/16"	0.188"	5/16"	Zinc-1	8500
S-MD 10-16x3/4 HWH #2	1/2"	0.035"	0.110"	5/16"	0.313"	5/16"	Zinc-1	6500
S-MD 10-16x1 HWH #2	3/4"	0.035"	0.110"	1/2"	0.500"	5/16"	Zinc-1	5000

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F For more information on corrosion resistance, reference Section 3.6.1.6.

Light / Medium Gauge Metal Applications

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 10-16x5/8 HWH #3	5/16"	0.110"	0.175"	3/16"	0.187"	5/16"	Zinc-1	7500
S-MD 10-16x3/4 HWH #3	1/2"	0.110"	0.175"	3/8"	0.375"	5/16"	Zinc-1	6500
S-MD 10-16x3/4 HHWH #3	1/2"	0.110"	0.175"	3/8"	0.375"	5/16"	Zinc-1	6500
S-MD 10-16x1 HWH #3	3/4"	0.110"	0.175"	5/8"	0.625"	5/16"	Zinc-1	5000
S-MD 10-16x1 1/4 HWH #3	1"	0.110"	0.175"	7/8"	0.875"	5/16"	Zinc-1	4000
S-MD 10-16x1 1/2 HWH #3	1-1/4"	0.110"	0.175"	1-1/8"	1.125"	5/16"	Zinc-1	4000
S-MD 10-16x5/8 PPH #3	5/16"	0.110"	0.175"	5/16"	0.313"	PHL #2	Zinc-1	7500
S-MD 10-16x3/4 PPH #3	1/2"	0.110"	0.175"	3/8"	0.375"	PHL #2	Zinc-1	6500
S-DD 10-16x5/8 PPCH #3	1/2"	0.110"	0.175"	5/16"	0.313"	PHL #2	Zinc-1	7500
S-DD 10-12x3/4 PPTH #3	9/16"	0.110"	0.175"	3/8"	0.375"	PHL #2	Zinc-1	7500
S-DD 10-18x3/4 PTH #3	9/16"	0.110"	0.175"	3/8"	0.375"	PHL #2	Zinc-1	5000
S-MD 12-14x3/4 HWH #3	1/2"	0.110"	0.210"	5/16"	0.313"	5/16"	Zinc-1	5000
S-MD 12-14x1 HWH #3	3/4"	0.110"	0.210"	9/16"	0.562"	5/16"	Zinc-1	3000
S-MD 12-14x1 1/2 HWH #3	1-1/4"	0.110"	0.210"	1-1/16"	1.062"	5/16"	Zinc-1	2500
S-MD 12-14x2 HWH #3	1-5/8"	0.110"	0.210"	1-9/16"	1.562"	5/16"	Zinc-1	2000
S-DD 12-14x1 TPCH #3	11/16"	0.110"	0.210"	1/2"	0.500"	TX 25 HF	Zinc-2	7500
S-MD 1/4-14x3/4 HWH #3	1/2"	0.110"	0.220"	5/16"	0.313"	3/8"	Zinc-1	4000
S-MD 1/4-14x1 HWH #3	3/4"	0.110"	0.220"	9/16"	0.562"	3/8"	Zinc-1	3000
S-MD 1/4-14x1 1/2 HWH #3	1-1/4"	0.110"	0.220"	1-1/16"	1.062"	3/8"	Zinc-1	2000
S-MD 1/4-14x2 HWH #3	1-5/8"	0.110"	0.220"	1-9/16"	1.562"	3/8"	Zinc-1	1000
S-MD 12-14x3/4 HWH #3 Kwik-Seal	1/4"	0.110"	0.210"	1/8"	0.125"	5/16"	Kwik-Cote	3000
S-MD 12-14x1 HWH #3 Kwik-Seal	5/8"	0.110"	0.210"	3/8"	0.375"	5/16"	Kwik-Cote	2500
S-MD 12-14x1 1/4 HWH #3 Kwik-Seal	1"	0.110"	0.210"	5/8"	0.625"	5/16"	Kwik-Cote	2000
S-MD 12-14x1 1/2 HWH #3 Kwik-Seal	1-1/4"	0.110"	0.210"	7/8"	0.875"	5/16"	Kwik-Cote	2000
S-MD 12-14x2 HWH #3 Kwik-Seal	1-1/2"	0.110"	0.210"	1-3/8"	1.375"	5/16"	Kwik-Cote	1500
S-MD 1/4-14x1 HWH #3 Kwik-Seal	5/8"	0.110"	0.220"	3/8"	0.375"	3/8"	Kwik-Cote	2000
S-MD 1/4-14x1 1/2 HWH #3 Kwik-Seal	1"	0.110"	0.220"	7/8"	0.875"	3/8"	Kwik-Cote	1500

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Zinc-2 = Cr3+ (Cr6+ free) 8-14 µm, Kwik-Cote = Proprietary Coating, Section 3.6.2.2. For more information on corrosion resistance, reference Section 3.6.1.6.

Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

3.6.2 Self-Drilling Screws

Single Self-Drilling Screws – Heavy Gauge Metal Applications

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
S-MD 12-24x7/8 HWH #4	1/2"	0.175"	0.250"	3/8"	0.375"	5/16"	Zinc-1	4500
S-MD 12-24x1 1/4 HWH #4	3/4"	0.175"	0.250"	5/8"	0.625"	5/16"	Zinc-1	3500
S-MD 12-24x1 1/4 HWH #5	1/2"	0.250"	0.500"	7/16"	0.437"	5/16"	Zinc-1	4000
S-MD 12-24x1 1/4 HWH #5 Kwik-Cote	1/2"	0.250"	0.500"	5/16"	0.313"	5/16"	KwikCote	4000
S-MD 12-24x2 HWH #5 Kwik-Cote	1-1/4"	0.250"	0.500"	1-3/16"	1.187"	5/16"	KwikCote	2000
S-MD 12-24x3 HWH #5 Kwik-Cote	2-1/4"	0.250"	0.500"	2-3/16"	2.187"	5/16"	KwikCote	1000
S-MD 12-24x1 1/4 HWH #5 Kwik-Cote Bond Washer	1/2"	0.250"	0.500"	5/16"	0.313"	5/16"	KwikCote	2500

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; Kwik Cote = Proprietary Coating, Section 3.6.2.2. For more information on corrosion resistance, reference Section 3.6.1.6.

Single Self-Drilling Screws – Heavy Gauge Metal Applications

Description	Thread Length	Drilling Capacity		Maximum Total Thickness (MT) ¹		Recess	Coating ²	Box Qty
		Min	Max					
Wood Drill Screws								
Decking Screws (Plywood to Framing)								
S-WD 8-18x1 5/16 PFH #3	1/2"	0.050"	0.140"	1/2"	0.500"	PHL #2	BP	6000
S-WD 8-18x1 15/16 PFH #3	5/8"	0.050"	0.140"	3/4"	0.750"	PHL #2	BP	4000
S-WD 10-24x1 PWH #3	3/4"	0.050"	0.175"	5/8"	0.625"	PHL #2	Zinc-1	6000
S-WD 10-24x1 1/4 PWH #3	1"	0.050"	0.175"	7/8"	0.875"	PHL #2	Zinc-1	5000
S-WD 10-24x1 1/2PWH #3	1-1/4"	0.050"	0.175"	1-1/8"	1.125"	PHL #2	Zinc-1	3500
Winged Reamer Wood Drill Screws								
S-WW 10-24x1 7/16 PWH #3 wings	1"	0.050"	0.175"	3/4"	0.750"	PHL #2	Zinc-1	4000
S-WW 12-24x2 PFH #4 wings	1-3/8"	0.050"	0.232"	1-1/4"	1.250"	PHL #2	Zinc-1	2000
S-WW 12-24x2 1/2 PFH #4 wings	2"	0.050"	0.232"	1-3/4"	1.750"	PHL #2	Zinc-1	1500
S-WW 14-20x2 3/4 PFH #4 wings	2-1/4"	0.050"	0.250"	2"	2.000"	PHL #2	Zinc-1	1000

1 Refer to Figure in Section 3.6.1.5.

2 For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; BP = Black Phosphate. For more information on corrosion resistance, reference Section 3.6.1.6.

Warning: Because of the potential for delayed hydrogen assisted stress corrosion cracking, many hardened steel fasteners are not recommended for use with dissimilar metals or chemically treated wood when moisture may be present or in corrosive environments. For further information, contact Hilti Technical Support at 1-877-749-6337.

Self-Drilling Screws 3.6.2

Drywall Applications (Drywall to steel, framing and lathing screws)

Description	Coating ¹	Box Qty	Application
6 x 1 PBH SD	DGP	10,000	Fastening Drywall, plywood, insulation, etc. to metal studs from 14 ga to 20 ga
6 x 1 PBH SD Zinc	Zinc-1	10,000	
6 x 1-1/8 PBH SD	DGP	10,000	
6 x 1-1/8 PBH SD Zinc	Zinc-1	10,000	
6 x 1-1/4 PBH SD	DGP	8,000	
6 x 1-1/4 PBH SD Zinc	Zinc-1	8,000	
6 x 1-5/8 PBH SD	DGP	5,000	
6 x 1-5/8 PBH SD Zinc	Zinc-1	5,000	
6 x 1-7/8 PBH SD	DGP	4,000	
6 x 1-7/8 PBH SD Zinc	Zinc-1	4,000	
8 x 2-3/8 PBH SD	BP	2,500	
8 x 2-3/8 PBH SD Zinc	Zinc-1	2,500	
8 x 2-5/8 PBH SD	BP	1,600	
8 x 2-5/8 PBH SD Zinc	Zinc-1	1,600	
8 x 3 PBH SD	BP	1,400	
8 x 3 PBH SD Zinc	Zinc-1	1,400	
7 x 7/16 PPFH SD Framer	BP	10,000	Fastening stud to track from 14 ga to 20 ga
7 x 7/16 PPFH SD Framer Zinc	Zinc-1	10,000	
8 x 1/2 PPH SD Framer Zinc	Zinc-1	10,000	
10 x 5/8 PPCH SD Framer	Zinc-1	7,500	
10 x 3/4 PFTH SD Framer Zinc	Zinc-1	7,500	
10 x 3/4 PTH SD Framer Zinc	Zinc-1	5,000	
8 x 1/2 PTH SD Lathing Zinc	Zinc-1	10,000	Fastening wire lath to 14 ga to 20 ga
8 x 3/4 PTH SD Lathing Zinc	Zinc-1	10,000	
8 x 1 PTH SD Lathing Zinc	Zinc-1	8,000	
8 x 1-1/4 PTH SD Lathing Zinc	Zinc-1	8,000	
6 x 1-5/8 SFH SD	DGP	5,000	Fastening wood trim and base to 14 ga to 20 ga studs
6 x 2-1/4 SFH SD Zinc	Zinc-1	3,000	

¹ For coating abbreviations, Zinc-1 = EN/ISO 4042 A3F; BP = Black Phosphate; DGP = Dark Grey Phosphate. For more information on corrosion resistance, reference Section 3.6.1.6.

The importance of IBC compliant screws.

ICC-ES ESR-2196 provides IBC recognition of Hilti's Self-Drilling Screw Fasteners. This recognition was based on a comprehensive and rigorous independent evaluation of Hilti's Self-Drilling Screw Fasteners to the latest IBC code requirements in ICC-ES AC118 Acceptance Criteria for Self-Tapping Screw Fasteners, as well as the AISI S904 and AISI S905 test standards.

AC118 provides the IBC code recognition and quality assurance for screw fasteners. ICC-ES ESR-2196 recognizes many types of Hilti screws for the most common applications including CFS connections, gypsum to CFS, etc. Specifically, ESR-2196 covers the HWH, HHWH, PPH, PPFH, PBH, PWH, PTH, PPCH, TPCH and PFTH head style Hilti screws.

To ensure IBC compliance of screws on your next project, reference ESR-2196.





Pins for Non Structural Metal
Framing

The following excerpt are pages from the North American Product Technical Guide, Volume 1: Direct Fastening, Edition 15.

Please refer to the publication in its entirety for complete details on this product including data development, product specifications, general suitability, installation, corrosion and spacing and edge distance guidelines.

US & CA: <http://submittals.us.hilti.com/PTGVol1/>

To consult directly with a team member regarding our direct fastening products, contact Hilti's team of technical support specialists between the hours of 7:00am – 6:00pm CST.

US: 877-749-6337 or HNATechnicalServices@hilti.com

CA: 1-800-363-4458, ext. 6 or CATechnicalServices@hilti.com

Drywall Track Fastening Systems 3.2.6

3.2.6.1 Product Description

Hilti offers both powder-actuated and gas-actuated systems for attaching drywall track to concrete or steel. Powder-actuated fastening systems typically have more power than gas-actuated fastening systems allowing for higher application limits with various base materials. Powder-actuated fasteners range in length from 1/2" to 2-1/2" for a wide variety of applications such as drywall track attachment. Gas-actuated fastening systems are focused on high volume repetitive fastenings such as drywall track to standard strength concrete or steel (1/2" to 1-5/8" fastener length).



Product Features:

Powder-actuated fasteners:

- Shank diameters* of 0.138", 0.145" or 0.157" are available providing a variety of solutions depending on application requirements.
- Knurled shank fasteners available for steel applications.
- Full range of fasteners either collated or in single fastener configurations to maximize productivity.

Gas-actuated fasteners:

- Shank diameter of 0.118" provides ease of penetration in concrete and steel.
- Collated fastener offering for high productivity in high volume applications.
- Ideally suited for interior (drywall track), non-load bearing, non-structural framing applications in concrete or steel.

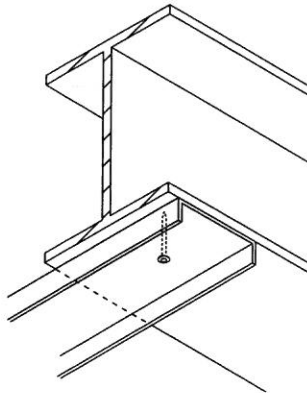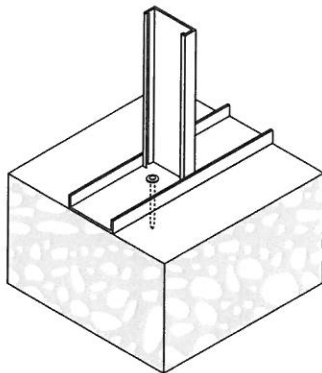

3.2.6.1 Product Description

3.2.6.2 Material Specifications

3.2.6.3 Technical Data


3.2.6.4 Ordering Information



Collated Track Fasteners for Concrete



Collated Track Fasteners for Steel



Track Fastener with Metal "Top Hat" Washer

Track Fastener with Plastic "Top Hat" Washer

Listings/Approvals

ICC-ES (International Code Council)

ESR-2269 (X-U and X-U 15)
 ESR-1752 (X-GN, X-EGN, X-GHP, X-S13, X-S16, X-C 22 P8TH and X-C 20 THP)
 ESR-1663 (X-C, X-C 22 P8TH and X-C 20 THP)

COLA (City of Los Angeles)

RR 25675 (X-U and X-U 15)
 RR 25662 (X-GN, X-EGN, X-GHP, X-S13, X-S16, X-C 22 P8TH and X-C 20 THP)
 RR 25646 (X-C, X-C 22 P8TH and X-C 20 THP)



3.2.6.2 Material Specifications

Fastener Designation	Fastener Material	Fastener Plating	Base Material	Powder-Actuated or Gas-Actuated
X-S13 THP	Carbon Steel	5 µm Zinc ¹	Steel	Powder-Actuated
X-S16 P8TH	Carbon Steel	5 µm Zinc ¹	Steel	Powder-Actuated
X-U 15	Carbon Steel	5 µm Zinc ¹	Steel	Powder-Actuated
X-C	Carbon Steel	5 µm Zinc ¹	Concrete or Masonry	Powder-Actuated
X-EGN	Carbon Steel	2-10 µm Zinc	Steel	Gas-Actuated
X-GN	Carbon Steel	5 µm Zinc ¹	Concrete or Masonry	Gas-Actuated
X-GHP	Carbon Steel	2-10 µm Zinc	High-Strength Concrete or Steel	Gas-Actuated

¹ ASTM B633, SC 1, Type III. Refer to Section 2.3.3.1 for more information.

* X-U Universal Powder-Actuated fasteners with 0.157" shank diameter are also available for drywall track fastening and are discussed in more detail in Sections 3.2.3 and 3.2.4.

3.2.6 Drywall Track Fastening Systems

3.2.6.3 Technical Data

Allowable Loads in Normal Weight Concrete^{1,3}

Fastener Description	Fastener	Shank Diameter* in. (mm)	Minimum Embedment in. (mm)	Concrete Compressive Strength					
				2000 psi		4000 psi		6000 psi	
				Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)
Drywall Track Fastener	X-C 22 P8TH (Black collated strip or guidance washer) ²	0.138 (3.5)	3/4 (19)	55 (0.24)	130 (0.58)	90 (0.40)	170 (0.76)	100 (0.44)	200 (0.89)
Drywall Track Gas Fastener	X-GN	0.118 (3.0)	3/4 (19) 1 (25)	95 (0.42) 115 (0.51)	120 (0.53) 220 (0.98)	95 (0.42) 115 (0.51)	120 (0.53) 220 (0.98)	-	-
Drywall Track Gas Fastener	X-GHP	0.118 (3.0)	5/8 (16)	-	-	50 (0.22)	120 (0.53)	50 (0.22)	90 (0.40)

- The tabulated allowable load values are for the low-velocity fasteners only, using a safety factor that is greater than or equal to 5.0, calculated in accordance with ICC-ES AC70. Wood or steel members connected to the substrate must be investigated in accordance with accepted design criteria.
- Allowable load values are for X-C 22 P8TH fasteners with black collated strips or guidance washers. IMPORTANT! For X-C 22 P8TH fasteners with white collated strips or guidance washers, refer to the 2013 edition of the Hilti North American Product Technical Guide Volume 1: Direct Fastening.
- Multiple fasteners are recommended for any attachment.

Allowable Loads in Minimum $f'_c = 3000$ psi Structural Lightweight Concrete^{1,6}

Fastener Description	Fastener	Shank Diameter* in. (mm)	Minimum Embedment in. (mm)	Fastener Location					
				Installed into Concrete		Installed Through 3" Deep Metal Deck into Concrete ^{2,3}			
				Tension lb (kN)	Shear lb (kN)	Tension lb (kN)		Shear lb (kN)	
Upper Flute	Lower Flute								
Drywall Track Fastener	X-C 20 THP ⁴	0.138 (3.5)	5/8 (16)	55 (0.24)	110 (0.49)	55 (0.24)	-	110 (0.49)	
Drywall Track Fastener	X-C 22 P8TH (Black collated strip or guidance washer) ⁵	0.138 (3.5)	3/4 (19)	120 (0.53)	220 (0.98)	120 (0.53)	95 (0.42)	260 (1.16)	
Drywall Track Gas Fastener	X-GN	0.118 (3.0)	3/4 (19) 1 (25)	115 (0.51) 170 (0.76)	140 (0.62) 220 (0.98)	75 (0.33) 155 (0.69)	85 (0.38) 160 (0.71)	175 (0.78) 255 (1.13)	
Drywall Track Gas Fastener	X-GHP	0.118 (3.0)	5/8 (16)	60 (0.27)	140 (0.62)	60 (0.27)	60 (0.27)	175 (0.78)	

- The tabulated allowable load values are for the low-velocity fasteners only, using a safety factor that is greater than or equal to 5.0, calculated in accordance with ICC-ES AC70. Wood or steel members connected to the substrate must be investigated in accordance with accepted design criteria.
- The steel deck profile is 3" deep composite floor deck with a thickness of 20 gauge (0.0358"). Figure 1 (Section 3.2.1.1.6) shows the nominal flute dimensions, fastener locations, and load orientations for the deck profile.
- Structural lightweight concrete fill above top of metal deck shall be a minimum of 3-1/4" deep.
- Allowable load values apply to X-C 20 THP fasteners with black or white collated strips or guidance washers.
- Allowable load values are for X-C 22 P8TH fasteners with black collated strips or guidance washers. IMPORTANT! For X-C 22 P8TH fasteners with white collated strips or guidance washers, refer to the 2013 edition of the Hilti North American Product Technical Guide Volume 1: Direct Fastening.
- Multiple fasteners are recommended for any attachment.

Allowable Loads in Minimum $f'_c = 3000$ psi Structural Lightweight Concrete Over 1-1/2" Deep, B-Type Steel Deck^{1,5}

Fastener Description	Fastener	Shank Diameter* in. (mm)	Minimum Embedment in. (mm)	Fastener Location			
				Installed Through 1-1/2" Deep Metal Deck into Concrete ^{2,3}			
				Tension lb (kN)		Shear lb (kN)	
Upper Flute	Lower Flute						
Drywall Track Fastener	X-C 22 P8TH ⁴	0.138 (3.5)	3/4 (19)	90 (0.40)	110 (0.49)	295 (1.31)	
Drywall Track Gas Fastener	X-GN	0.118 (3.0)	3/4 (19)	75 (0.33)	85 (0.38)	175 (0.78)	
			1 (25)	155 (0.69)	160 (0.71)	255 (1.13)	
Drywall Track Gas Fastener	X-GHP	0.118 (3.0)	5/8 (16)	60 (0.27)	60 (0.27)	175 (0.78)	

- The tabulated allowable load values are for the low-velocity fasteners only, using a safety factor that is greater than or equal to 5.0, calculated in accordance with ICC-ES AC70. Wood or steel members connected to the substrate must be investigated in accordance with accepted design criteria.
- Steel deck profiles are 1-1/2" deep, B-type deck with a thickness of 20 gauge (0.0358"). Fasteners may be installed through the metal deck into lightweight concrete having both nominal and inverted deck profile orientations with a minimum lower flute width of 1-3/4" or 3-1/2", respectively. Fasteners shall be placed at centerline of deck flutes. Refer to Figures 2 and 3 (Section 3.2.1.1.6) for additional flute dimensions, fastener locations, and load orientations for both deck orientations.
- Structural lightweight concrete fill above top of metal deck shall be a minimum 2-1/2" deep.
- Allowable load values apply to X-C 22 P8TH fasteners with black or white collated strips or guidance washers.
- Multiple fasteners are recommended for any attachment.


* X-U Universal Powder-Actuated fasteners with 0.157" shank diameter are also available for drywall track fastening and are discussed in more detail in Sections 3.2.3 and 3.2.4.

Drywall Track Fastening Systems 3.2.6

Allowable Loads in Concrete Masonry Units^{1,2,3,4,5,10}

Fastener Description	Fastener	Shank Diameter* in. (mm)	Min. Embed. in. (mm)	Hollow CMU				Grout Filled CMU					
				Face Shell ⁶		Mortar Joint ⁶		Face Shell ⁶		Mortar Joint ⁶		Top of Grouted Cell ⁹	
				Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear ⁷ lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear ⁷ lb (kN)	Tension lb (kN)	Shear ⁹ lb (kN)
Drywall Track Gas Fastener	X-GN	0.118 (3.0)	3/4 (19)	90 (0.40)	115 (0.51)	65 (0.29)	55 (0.24)	95 (0.42)	120 (0.53)	70 (0.31)	85 (0.38)	65 (0.29)	90 (0.40)
			1 (25)	115 (0.51)	130 (0.58)	70 (0.31)	65 (0.29)	130 (0.58)	140 (0.62)	85 (0.38)	120 (0.53)	75 (0.33)	95 (0.42)
Drywall Track Gas Fastener	X-GHP	0.118 (3.0)	5/8 (16)	40 (0.18)	80 (0.36)	15 (0.07)	40 (0.18)	90 (0.40)	100 (0.44)	40 (0.18)	80 (0.36)	60 (0.27)	85 (0.38)

- The tabulated allowable load values are for the low-velocity fastener only, using a safety factor of 5.0 or higher calculated in accordance with ICC-ES AC70. Wood or steel members connected to the substrate must be investigated in accordance with accepted design criteria.
- The tabulated allowable load values are for low-velocity fasteners installed in normal weight or lightweight concrete masonry units conforming to ASTM C90.
- The tabulated allowable load values are for low-velocity fasteners installed in concrete masonry units with mortar conforming to ASTM C270, Type N.
- The tabulated allowable load values are for low-velocity fasteners installed in concrete masonry units with grout conforming to ASTM C476, as coarse grout.
- The tabulated allowable load values are for one low-velocity fastener installed in an individual masonry unit cell and at least 4" from the edge of the wall.
- Fastener can be located anywhere on the face shell as shown in the figure to the right.
- Shear direction can be horizontal or vertical (Bed Joint or T-Joint) along the CMU wall plane.
- Fastener located in center of grouted cell installed vertically.
- Shear can be in any direction.
- Multiple fasteners are recommended for any attachment.

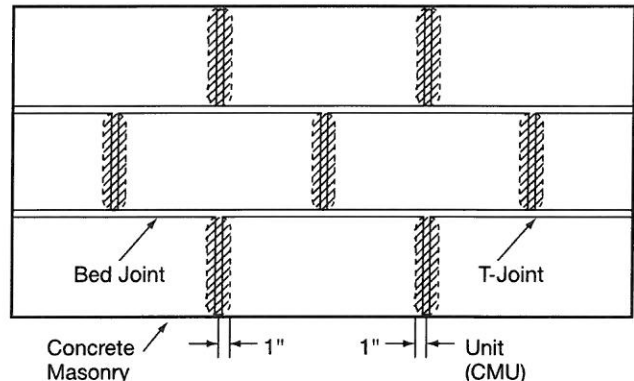

Acceptable Locations (NON-SHADED AREAS) for Drywall Track Fasteners in CMU Walls

Allowable Loads in Minimum ASTM A36 ($F_y \geq 36$ ksi; $F_u \geq 58$ ksi) Steel^{1,2,6,7}

Fastener Description	Fastener	Shank Diameter* in. (mm)	Steel Thickness (in.)											
			1/8		3/16		1/4		3/8		1/2		≥3/4	
			Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)
Standard Smooth Shank	X-S13	0.145 (3.7)	140 (0.62)	300 (1.33)	300 (1.33)	450 (2.00)	300 (1.33)	450 (2.00)	300 (1.33)	450 (2.00)	-	-	-	-
Drywall Track Smooth Shank w/Metal Top Hat Washer	X-S16 P8TH	0.145 (3.7)	-	-	250 (1.11)	530 (2.36)	330 (1.47)	575 (2.56)	335 (1.49)	610 (2.71)	265 (1.18)	480 (2.14)	-	-
Universal Knurled Shank	X-U 15	0.145 (3.7)	-	-	155 (0.69)	395 (1.76)	230 (1.02)	395 (1.76)	420 (1.87)	450 (2.00)	365 ⁵ (1.62)	500 ⁵ (2.22)	365 ⁵ (1.62)	400 ⁵ (1.78)
Drywall Track Smooth Shank	X-EGN ⁴	0.118 (3.0)	140 (0.62)	230 (1.02)	220 (0.98)	245 (1.09)	225 (1.00)	290 (1.29)	280 (1.25)	330 (1.47)	280 (1.25)	330 (1.47)	280 (1.25)	330 (1.47)
	X-EGN ^{3,4}	0.118 (3.0)	-	-	220 (0.98)	295 (1.31)	260 (1.16)	355 (1.58)	280 (1.25)	385 (1.71)	280 (1.25)	385 (1.71)	280 (1.25)	385 (1.71)
Drywall Track Gas Fastener	X-GHP	0.118 (3.0)	125 (0.56)	230 (1.02)	170 (0.76)	245 (1.09)	200 (0.89)	230 (1.02)	250 (1.11)	255 (1.13)	-	-	-	-

- The tabulated allowable load values are for the low-velocity fasteners only, using a safety factor that is greater than or equal to 5.0, calculated in accordance with ICC-ES AC70. Wood or steel members connected to the substrate must be investigated in accordance with accepted design criteria.
- Low-velocity fasteners shall be driven to where the point of the fastener penetrates the steel base material in accordance with Section 3.2.1.2.3, except as noted in this table.
- Based on testing with $F_y = 50$ ksi base material.
- X-EGN fasteners installed into 3/8" or thicker base steel require 0.320" minimum penetration depth.
- Based upon minimum point penetration of 15/32".
- Multiple fasteners are recommended for any attachment.
- Refer to guidelines for fastening to steel, Section 3.2.1.2, for application limits.

* X-U Universal Powder-Actuated fasteners with 0.157" shank diameter are also available for drywall track fastening and are discussed in more detail in Sections 3.2.3 and 3.2.4.

3.2.6 Drywall Track Fastening Systems

Allowable Tensile Pullover and Shear Bearing Load Capacities for Steel Framing with Power-Driven Fasteners^{1,2,3,4}

Fastener Description*	Fastener	Head Dia. in. (mm)	Sheet Steel Thickness													
			14 ga.		16 ga.		18 ga.		20 ga.		22 ga.		24 ga.		25/26 ga.	
			Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)	Tension lb (kN)	Shear lb (kN)
0.118" shank with MX collation	X-GN, X-EGN, X-GHP	0.276 (7.0)	-	-	-	-	325 (1.45)	390 (1.73)	265 (1.18)	335 (1.49)	250 (1.11)	235 (1.05)	170 (0.76)	185 (0.82)	100 (0.44)	125 (0.56)
0.138" shank with metal or Plastic Top Hat Washer	X-C 22 P8TH ⁵ , X-C 20 THP ⁵	0.322 (8.2)	-	860 (3.83)	685 (3.05)	715 (3.18)	490 (2.18)	465 (2.07)	360 (1.60)	375 (1.67)	300 (1.33)	265 (1.18)	205 (0.91)	200 (0.89)	120 (0.53)	130 (0.58)
0.145" shank with Plastic Top Hat Washer	X-S13 THP	0.322 (8.2)	-	985 (4.38)	685 (3.05)	720 (3.20)	490 (2.18)	515 (2.29)	360 (1.60)	440 (1.96)	300 (1.33)	310 (1.38)	205 (0.91)	235 (1.05)	120 (0.53)	145 (0.64)
0.145" shank with Metal Top Hat Washer	X-S16 P8TH, X-U 15 P8TH	0.322 (8.2)	-	-	940 (4.18)	940 (4.18)	785 (3.49)	685 (3.05)	625 (2.78)	550 (2.45)	510 (2.27)	465 (2.07)	390 (1.73)	365 (1.62)	335 (1.49)	315 (1.40)

1 Allowable load values are based on a safety factor of 3.0 in accordance with the AISI S100.

2 Allowable pullover capacities of sheet steel should be compared to the allowable fastener tensile load capacities in concrete, steel, and masonry to determine controlling resistance load.

3 Allowable shear bearing capacities of sheet steel should be compared to allowable fastener shear capacities in concrete, steel or masonry to determine controlling resistance load.

4 Data is based on the following minimum sheet steel properties, $F_y = 33$ ksi, $F_u = 45$ ksi (ASTM A653 material).

5 Allowable load values apply to X-C 22 P8TH and X-C 20 THP fasteners with black or white collated strips or guidance washers.

3.2.6.4 Ordering Information

Powder-Actuated (Concrete)

Fastener Description	Shank Length in. (mm)	Shank Ø* in. (mm)	Washer Ø	Packaging Qty
X-C 20 THP	3/4 (20)	0.138 (3.5)	8 mm plastic tophat	1000 pcs/box
X-C 22 TH	7/8 (22)	0.138 (3.5)	8 mm metal tophat	1000 pcs/box
X-C 20 MX	3/4 (20)	0.138 (3.5)	Collated	1000 pcs/box

Powder-Actuated (Steel)

Fastener Description	Shank Length in. (mm)	Shank Ø* in. (mm)	Washer Ø	Packaging Qty
X-S13 THP	1/2 (13)	0.145 (3.7)	8 mm plastic tophat	100 or 1000 pcs/box
X-S13 MX	1/2 (13)	0.145 (3.7)	Collated	100 or 1000 pcs/box
X-S16 TH	5/8 (16)	0.145 (3.7)	8 mm metal tophat	1000 pcs/box
X-U 15 TH	5/8 (16)	0.145 (3.7)	8 mm metal tophat	1000 pcs/box
X-U 15 MX	5/8 (16)	0.145 (3.7)	Collated	1000 pcs/box

Gas-Actuated (Concrete)

Fastener Description	Shank Length in. (mm)	Shank Ø in. (mm)	Washer Ø	Packaging Qty
X-GN 20 MX	3/4 (20)	0.118 (3.0)	Collated	750 pcs/box
X-GN 27 MX	1 (27)	0.118 (3.0)	Collated	750 pcs/box
X-GN 32 MX	1-1/4 (32)	0.118 (3.0)	Collated	750 pcs/box
X-GHP 18 MX	11/16 (18)	0.118 (3.0)	Collated	750 pcs/box
X-GHP 20 MX	3/4 (20)	0.118 (3.0)	Collated	750 pcs/box

Gas-Actuated (Steel)

Fastener Description	Shank Length in. (mm)	Shank Ø in. (mm)	Washer Ø	Packaging Qty
X-EGN 14 MX (steel)	1/2 (14)	0.118 (3.0)	Collated	750 pcs/box
X-GHP 18 MX	11/16 (18)	0.118 (3.0)	Collated	750 pcs/box
X-GHP 20 MX	3/4 (20)	0.118 (3.0)	Collated	750 pcs/box

* X-U Universal Powder-Actuated fasteners with 0.157" shank diameter are also available for drywall track fastening and are discussed in more detail in Sections 3.2.3 and 3.2.4.